

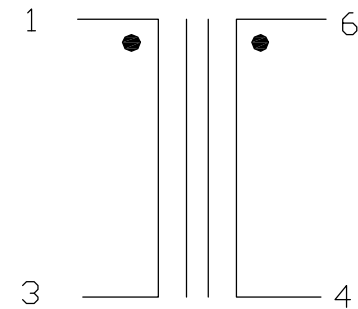


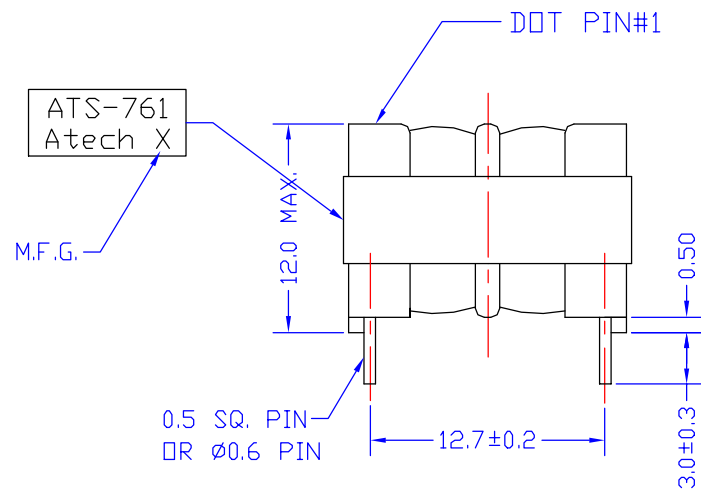

## ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 4-6 = 45 mΩHM MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 1-3 = 2 mH ±25%.
3. TURN RATIO (@1KHZ, 0.1Vrms) : PIN 1-3 : PIN 6-4 = 1 ± 4%.
4. HI-POT (@2000VAC, 1mA, 1MIN) : PIN 1-6

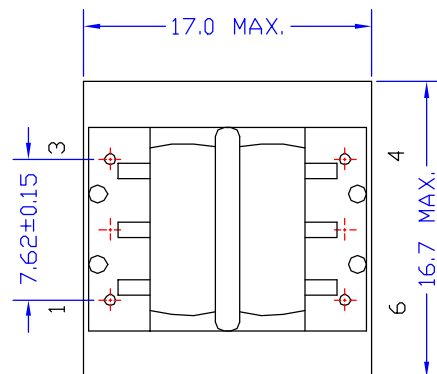

|           |             |            |      |        |       |                                                                                    |  |                       |              |
|-----------|-------------|------------|------|--------|-------|------------------------------------------------------------------------------------|--|-----------------------|--------------|
|           |             |            |      |        |       | <b>Atech®</b><br>Atech Technology Co., Ltd.<br>TEL: 02-2794-6667 FAX: 02-2794-8004 |  | TITLE<br>COMMON CHOKE |              |
|           |             |            |      |        |       |                                                                                    |  | DWG. NO.<br>ATS-761   |              |
|           | RELEASE     | 06/23/2005 | BART | EEFLYS | SUEDY | UNITS:<br>M/M                                                                      |  | SAFETY                | SHEET 1 OF 1 |
| NO.       | DESCRIPTION | DATE       | BY   | CHK    | APPD  | DATE<br>06/23/05                                                                   |  |                       |              |
| REVISIONS |             |            |      |        |       |                                                                                    |  | DRAW<br>Pair          |              |