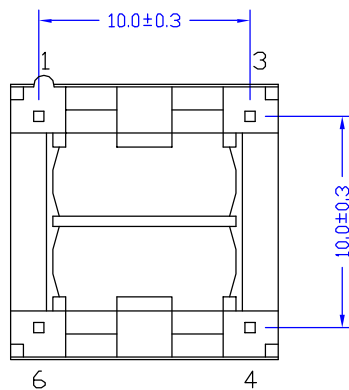
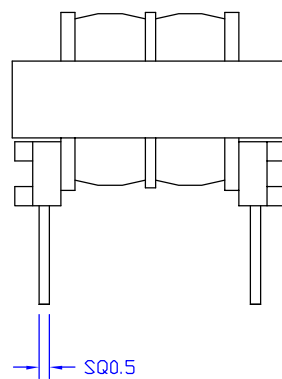
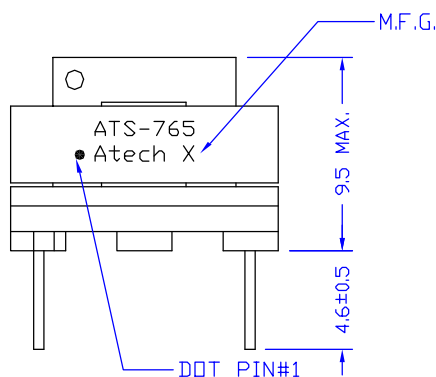
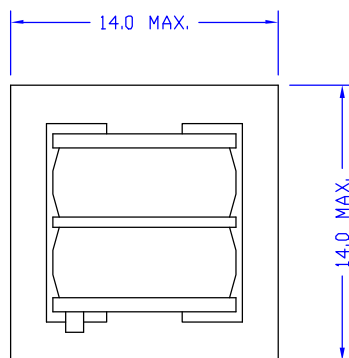


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = $1.75 \Omega \text{HM} \pm 10\%$
PIN 4-6 = $1.75 \Omega \text{HM} \pm 10\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-3 = $2.42\text{mH} \pm 5\%$
PIN 4-6 = $2.42\text{mH} \pm 5\%$
- TURN RATIO (@200KHz, 0.1Vrms) :
PIN 1-3 : 4-6 = $1 \pm 2\%$
- HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co. Ltd. TEL:02-2794-6667 FAX:02-2794-8001		TITLE INDUCTOR	
								DWG. NO. ATS-765	
	RELEASE	08/31/2005	BART	MICHAEL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1 DRAW <i>Pair</i>
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/31/05			
REVISIONS									