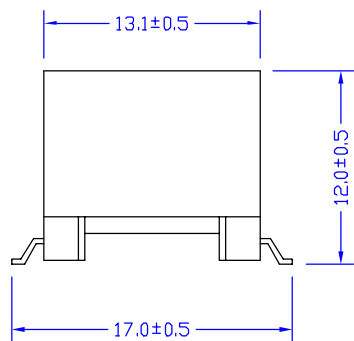
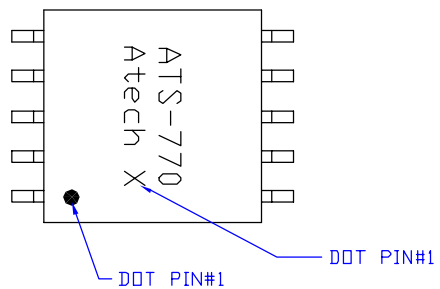


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 (2-4 SHORT) = 1.25 OHM MAX.
PIN 6-10 (7-9 SHORT) 0.35 OHM MAX.
- INDUCTANCE (@10KHz, 0.1 Vrms) :
PIN 1-5 (2-4 SHORT) = 100 uH ±5%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms)
PIN 1-5 (2-4, 6-7-9-10 SHORT) = 5 uH MAX.
- TURN RATIO (@30KHz, 0.1Vrms)
PIN 1-5 (2-4 SHORT) : PIN 10-6 (7-9 SHORT) = 2 ±2%.
- HI-POT (@1.875VAC, 0.5mA, 2 SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-770	
	RELEASE	09/12/2005	BART	VINCENTSUEJY	UNITS: M/M		SAFETY	SHEET 1 of 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						09/12/05		