
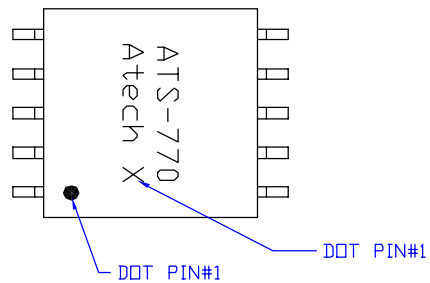


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 (2-4 SHORT) = 1.25 OHM MAX.
PIN 6-10 (7-9 SHORT) 0.35 OHM MAX.
- INDUCTANCE (@10KHz, 0.1 Vrms) :
PIN 1-5 (2-4 SHORT) = 100 uH ±5%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms)
PIN 1-5 (2-4, 6-7-9-10 SHORT) = 5 uH MAX.
- TURN RATIO (@30KHz, 0.1Vrms)
PIN 1-5 (2-4 SHORT) : PIN 10-6 (7-9 SHORT) = 2 ±2%.
- HI-POT (@1.875VAC, 0.5mA, 2 SEC) : PRI-SEC
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE	TRANSFORMER
								DWG. NO.	ATS-770R
	RELEASE	09/12/2005	BART	VINCENT	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	DRAW	Pair	
						09/12/05			