
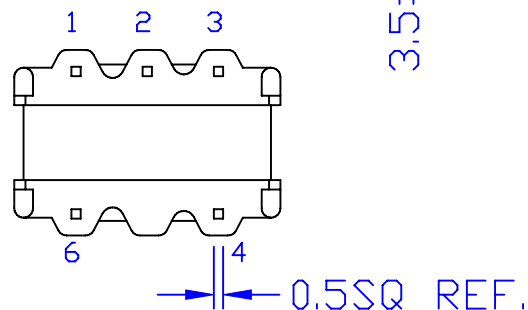
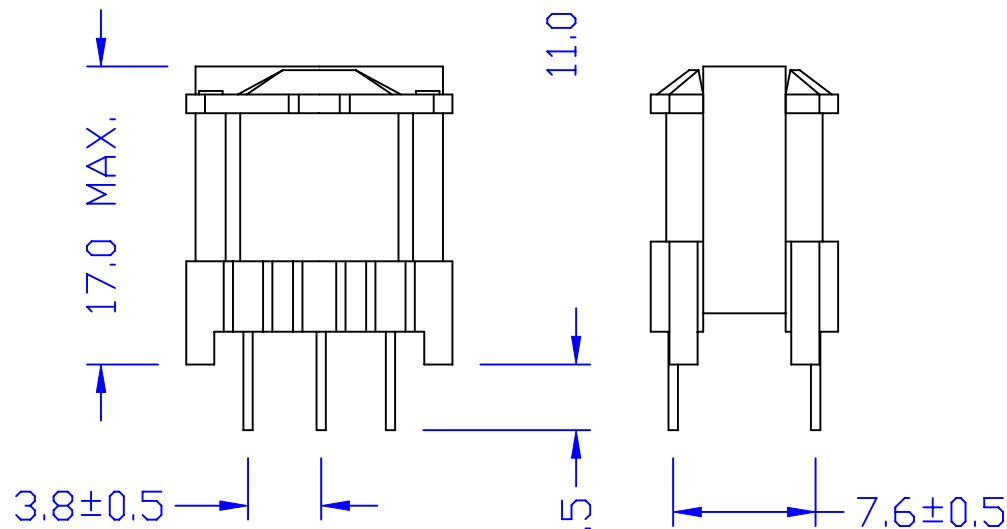
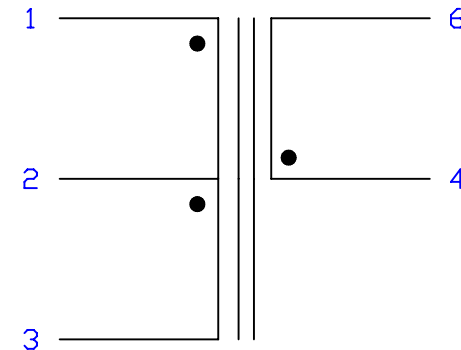


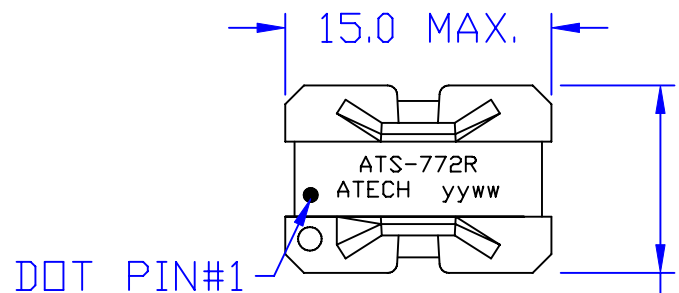

ELECTRICAL CHARACTERISTICAL :

- DCR : PIN 1-2 = 5.5 OHM $\pm 20\%$.
PIN 2-3 = 5.5 OHM $\pm 20\%$.
PIN 4-6 = 2 OHM $\pm 20\%$.
- INDUCTANCE (@1KHz, 1Vrms) :
PIN 1-2 = 18 mH MIN.
PIN 2-3 = 18 mH MIN.
PIN 4-6 = 8 mH MIN.
- LEAKAGE INDUCTANCE (@10KHz, 1Vrms) :
PIN 1-3 (4-6 SHORT) = 70 uH MAX.
- TURN RATIO (@10KHz, 0.1Vrms) :
PIN 1-2:4-6 = 1.45 $\pm 1\%$.
PIN 2-3:4-6 = 1.45 $\pm 1\%$.
- HI-POT (@500VAC, 1mA, 1MIN) :
PIN 1-4, 1-CORE, 4-CORE.
- RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
								ATS-772R
RELEASE		09/28/2007	PAIR	MICHAEL	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
M/M								
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N	DRAW
REVISIONS						09/28/07	CTX014000A	Pair