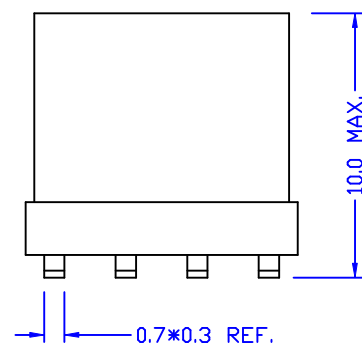
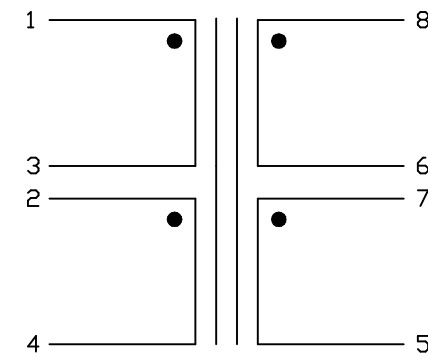
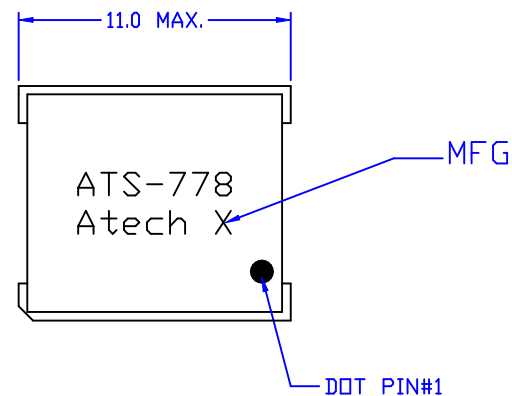


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 2.1 OHM MAX.
PIN 8-5 (6-7 SHORT) = 1.26 OHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 1.444 mH ±10%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3, 5-6-7-8 SHORT) = 5.8 uH MAX.
- INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-8 (2-3, 6-7 SHORT) = 36 pF MAX.
- TURN RATIO (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) : 8-5 (6-7 SHORT) = 1.31 ±2%.
- HI-POT (@1500VAC, 1mA, 2S) :
PIN 1-8 (2-3, 6-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE VDSL TRANSFORMER	
								DWG. NO. ATS-778	
A	CHAMFER	01/18/2006	BART	VINCENT	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	11/07/2005	BART	VINCENT	SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						11/07/05		Pair	