
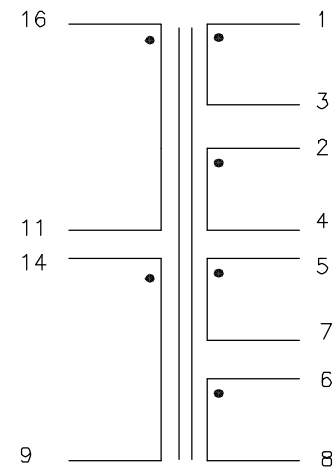
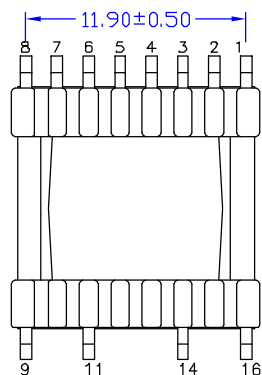




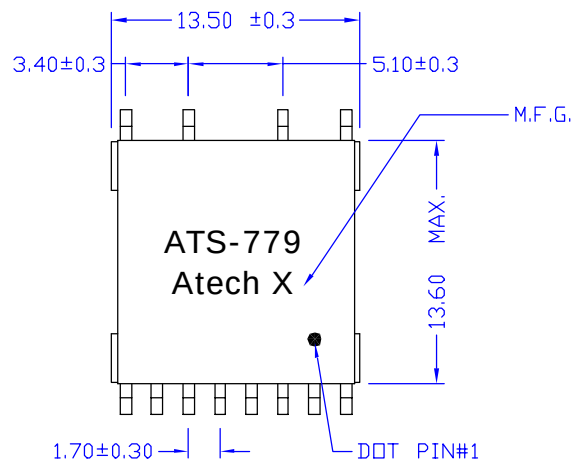

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 448 mOHM MAX.
PIN 5-8 (6-7 SHORT) = 2.76 OHM MAX.
PIN 16-9 (11-14 SHORT) = 5.29 OHM MAX.
- INDUCTANCE (@0.1Vrms, 10KHz) :
PIN 16-9 (14-11 SHORT) = 1.4 mH $\pm 10\%$.
- LEAKAGE INDUCTANCE (@0.1Vrms, 100KHz) :
PIN 9-16 (1-2-3-4, 11-14 SHORT) = 12 uH MAX.
PIN 9-16 (5-6-7-8, 11-14 SHORT) = 22.5 uH MAX.
- INTERWINDING CAPACITANCE (@0.1Vrms, 100KHz) :
PIN 1-16 (2-3, 11-14 SHORT) = 74.5 pF MAX.
PIN 5-16 (6-7, 11-14 SHORT) = 40.5 pF MAX.
PIN 1-8 (2-3, 6-7 SHORT) = 41.5 pF MAX.
- TURN RATIO (@0.1Vrms, 600KHz) :
PIN 16-9 (11-14 SHORT) : 1-4 (2-3 SHORT) = 4.21 $\pm 3\%$.
PIN 16-9 (11-14 SHORT) : 5-8 (6-7 SHORT) = 1.96 $\pm 3\%$.
- HI-POT (@1875VAC, 1mA, 2SEC) :
PRI-SEC

						Atech[®] Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE	TRANSFORMER
								DWG. NO.	ATS-779
	RELEASE	10/04/2005	BART	LYS	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			DRAW
REVISIONS						DATE			10/04/05