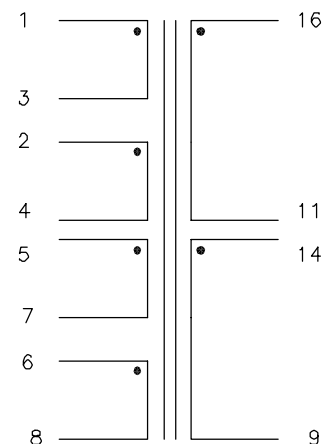
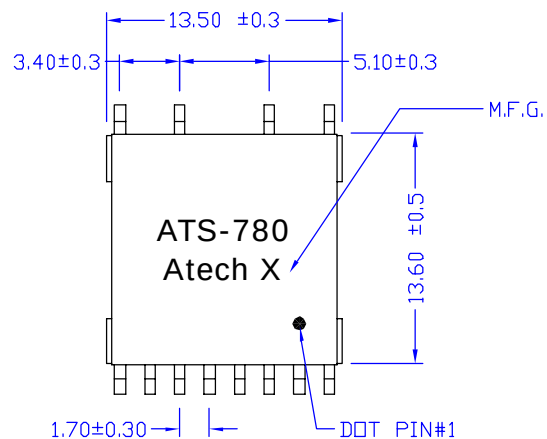


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 76 mOHM $\pm 15\%$.
PIN 5-8 (6-7 SHORT) = 370 mOHM $\pm 15\%$.
PIN 16-9 (11-14 SHORT) = 670 mOHM $\pm 15\%$.
- INDUCTANCE :
PIN 9-16 (11-14 SHORT) = 82uH $\pm 10\%$.
- LEAKAGE INDUTCTANCE (@100KHZ, 0.1Vrms) :
PIN 9-16 (1-2-3-4, 11-14 SHORT) = 4.7uH MAX.
PIN 9-16 (5-6-7-8, 11-14 SHORT) = 3.2uH MAX.
- INTERWINDING CAP. :
PIN 1-16 (2-3, 11-14 SHORT) = 27 pF MAX.
PIN 5-16 (6-7, 11-14 SHORT) 34 pF MAX.
PIN 1-8 (2-3, 6-7 SHORT) = 26 pF MAX.
- T.H.D.(@30KHZ, 2V) :
PIN 1-4 TO 9-16 (2-3, 11-14 SHORT) = -85 dB MAX.
PIN 5-8 TO 9-16 (6-7, 11-14 SHORT) = -85 dB MAX.
- TURN RATIO (@100KHZ, 0.1Vrms) :
PIN 16-9:1-4 (11-14, 2-3 SHORT) = 3.8 $\pm 3\%$.
PIN 16-9:5-8 (11-14, 6-7 SHORT) = 2 $\pm 3\%$.
- HI-POT (@1875VAC, 1mA, 2SEC)
PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE		ADSL	
								DWG. NO.		TRANSFORMER	
								ATS-780			
	RELEASE	09/26/2005	BART	MICHAEL	SUEDY	UNITS:	SAFETY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M				SHEET 1 OF 1	
REVISIONS						DATE		09/26/05	DRAW		Pair