

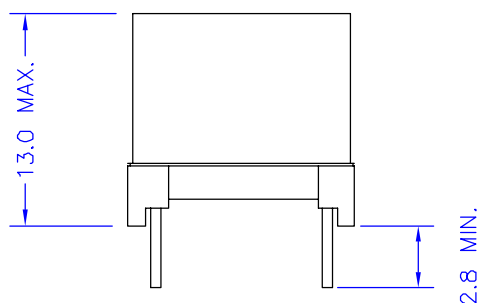
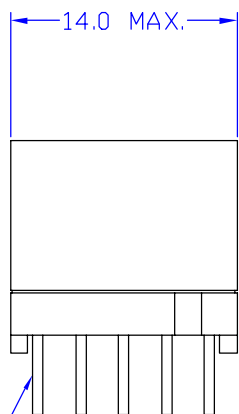
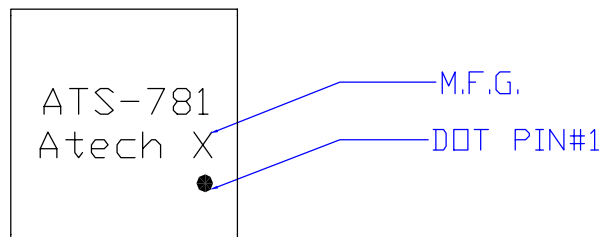


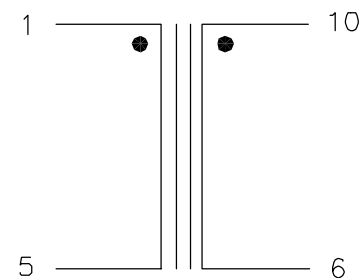

ø0.6 PIN (TYP.)

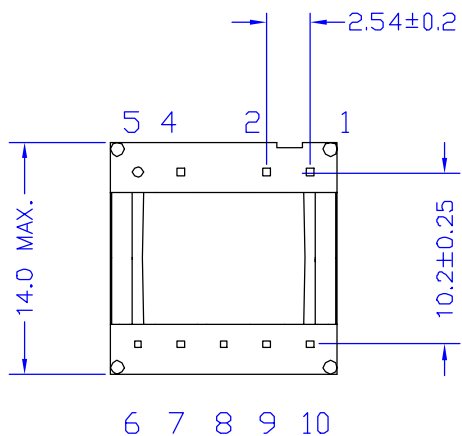

ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-5 = 1.9 OHM MAX.
PIN 10-6 = 1.7 OHM MAX.
- INDUCTANCE (@0.1Vrms, 10KHz, ALC OFF) :
PIN 1-5 = 2.5 mH ±10%.
- LEAKAGE INDUCTANCE (@0.1Vrms, 100KHz) :
PIN 1-5 (6-10 SHORT) = 3.6 µH MAX.
- INTERWINDING CAP (@0.1Vrms, 100KHz) :
PIN 1-10 = 50 pF MAX.
- INSERTION LOSS (0 dBm, W/H 100 OHM) :
770 KHz = 0.3 dB MAX.
- FREQUENCY RESPONSE (@770KHz REF) :
25 KHz = ±0.5 dB.
2 MHz = ±0.5 dB.
- TURN RATIO (@0.1Vrms, 200KHz) :
PIN 1-5:10-6 = 1±1%.
- HI-POT (@1.5KVAC, 1mA, 1MIN) :
PRI-SEC

						Atech®		TITLE	ADSL
						Atech Technology Co., Ltd.		DWG. NO.	TRANSFORMER
						TEL:(02)2794-6657 FAX:(02)2794-8004		ATS-781	
RELEASE	10/21/2005	BART	LYS	SUEBY	UNITS:	SAFETY		SHEET 1 OF 1	
ND: DESCRIPTION	DATE	BY	CHK	APPD	M/M			DRAW	
REVISIONS						10/21		Pair	