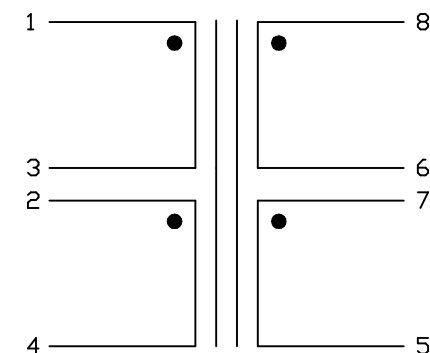
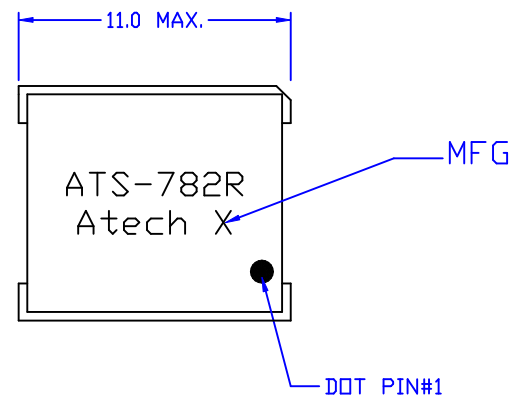


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 439 mΩ MAX.
PIN 8-6 = 5-7 = 280 mΩ MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 270 μH ±10%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3,5-6-7-8 SHORT) = 1 μH MAX.
- INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-8 (2-3, 6-7 SHORT) = 40 pF MAX.
- THD (@100KHz, 2Vrms) : -80 dB MAX.
- HI-POT (@1500VAC, 1mA, 2S) :
PIN 1-8 (2-3, 6-7 SHORT)
- RoHS COMPLIANCE

						Atech®		TITLE VDSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-782R	
						TEL:0212794-6667 FAX:0212794-8004			
RELEASE		10/26/2005	BART	MICHAEL	SUEDY	UNITS: M/M		SAFETY	
DESCRIPTION		DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						10/26/05		DRAW Pair	