
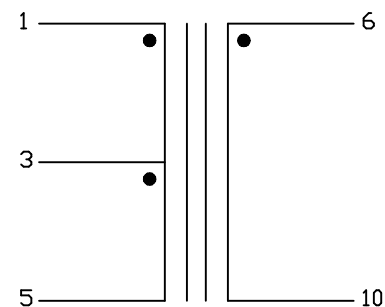
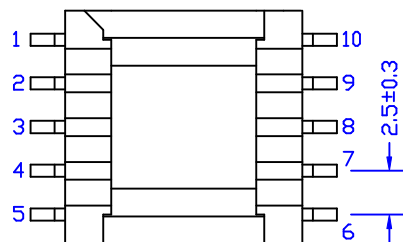

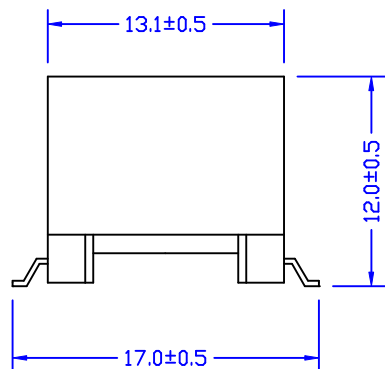


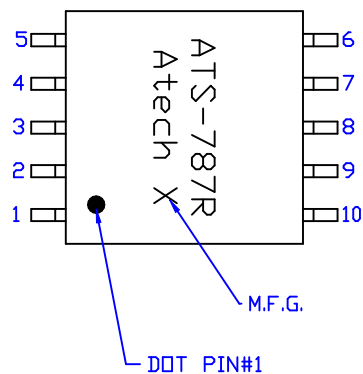

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 3.65 OHM MAX.
PIN 6-10 = 3.65 OHM MAX.
- INDUCTANCE (@1KHZ, 0.1Vrms) :
PIN 1-10 (5-6 SHORT) = 16 mH $\pm$ 10%.
PIN 1-10 (5-6 SHORT, W/H 100mA) = 16 mH $\pm$ 10%.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (6-10 SHORT) = 50 uH MAX.
- LONGITUDINAL BALANCE :
200HZ ~ 1KHZ = -65 dB MAX.
4KHZ = -54 dB MAX.
100KHZ ~ 500KHZ = -55 dB MAX.
- TURN RATIO (@100KHZ, 0.1Vrms) :
PIN 1-5 : 6-10 = 1 $\pm$ 1%.
PIN 1-3 : 3-5 = 1 $\pm$ 1%.
- HI-POT (@1500VAC, 1mA, 2SEC)
PIN 1-6
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE		TRANSFORMER	
								DWG. NO.		ATS-787R	
	RELEASE	11/15/2005	BART	LYS	SUEDY	UNITS:		SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M					
						DATE				DRAW	
REVISIONS						11/15/05		Pair			