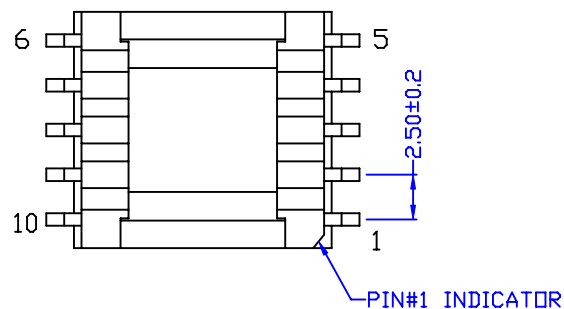
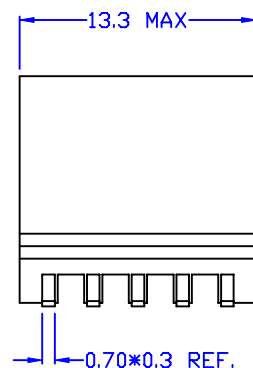
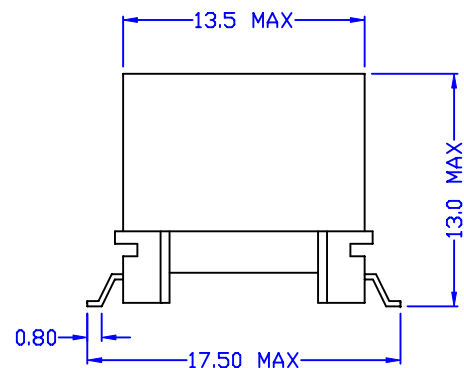
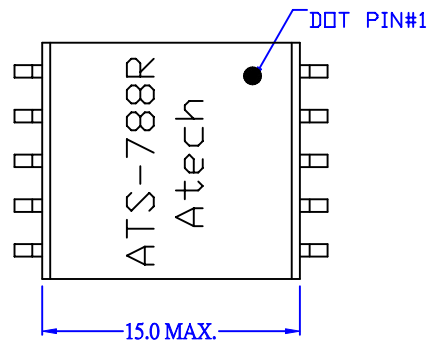


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-4 = 420 mΩHM ±5%
PIN 2-5 = 420 mΩHM ±5%
PIN 6-9 = 245 mΩHM ±5%
PIN 7-10 = 185 mΩHM ±5%
- INDUCTANCE (@10KHz, 0.1Vrms, 2-4 SHORT) :
PIN 1-5 = 100 uH ±5%
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-5 (2-4, 6-9-7-10 SHORT) = 4.5 uH MAX.
- TURN RATIO (@100KHz, 0.1Vrms 2-4:7-9 SHORT) :
PIN 1-5 : 10-6 = 2±5%
- HI-POT (@1875VAC, 1mA, 2SEC) : PRI-SEC
- RoHS COMPLIANT

Design to comply with the following requirements as defined by UL60950-1/CSA60950-1.
Supplementary insulation for a primary circuit at working voltage of 250Vrms.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER	
B	PIN # MARK	05/09/2007	PAIR	WILLIE	EUGENE		DWG. NO. ATS-788R	
A	T/R PIN	01/30/2007	PAIR	MICHAEL	EUGENE			
	RELEASE	05/16/2006	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						05/16/06	CTA41303KA	<i>Pair</i>