
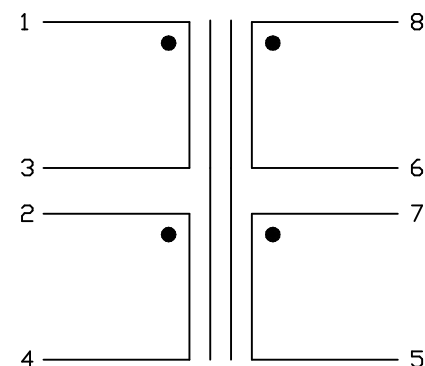
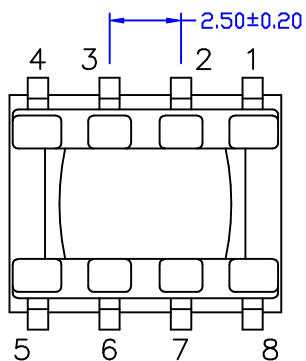




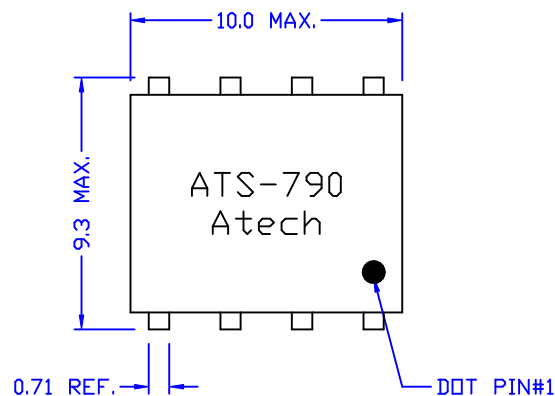

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 241 mΩHM MAX.
PIN 8-5 (6-7 SHORT) = 230 mΩHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 82 uH ±10%.
- LEAKAGE INDUCTANCE (@1MHz, 0.1Vrms) :
PIN 1-4 (2-3, 5-6-7-8 SHORT) = 0.7 uH MAX.
- INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 1-8 (2-3, 6-7 SHORT) = 30 pF MAX.
- TURN RATIO (@10KHz, 0.1Vrms) :
PIN 1-4:8-5 (2-3,6-7 SHORT) = 1.33 ±1%.
- HI-POT (@1500VAC, 1mA, 2SEC) :
PIN 1-8 (2-3, 6-7 SHORT)
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE VDSL TRANSFORMER	
								DWG. NO. ATS-790R	
	RELEASE	01/24/2006	BART	MICHAEL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						01/24/06		DRAW Pair	