
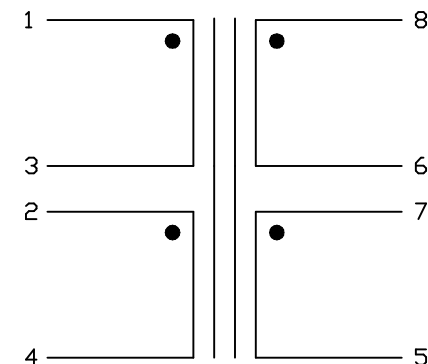
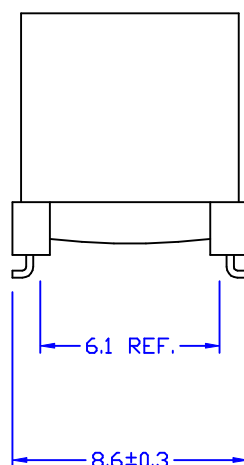
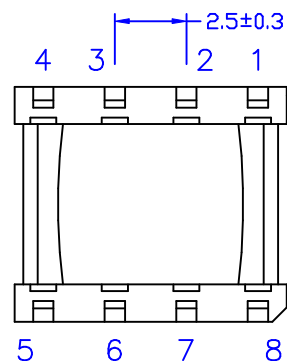
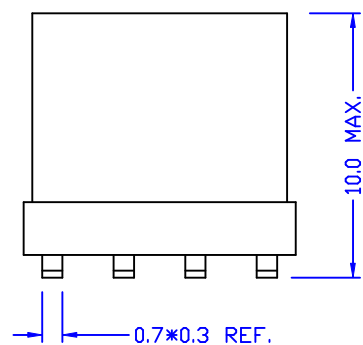


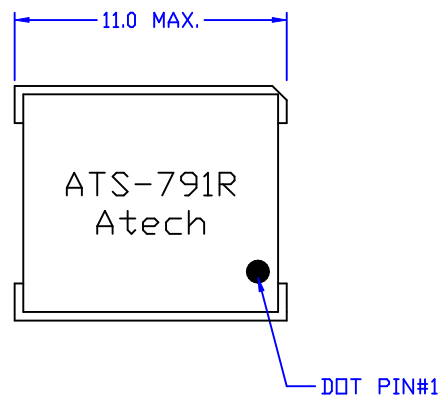

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 2 OHM MAX.
PIN 8-5 (6-7 SHORT) = 1.15 OHM MAX.
- INDUCTANCE (@0.1Vrms, 10KHz) :
PIN 1-4 (2-3 SHORT) = 470 uH ±10%.
- LEAKAGE INDUCTANCE (@0.1Vrms, 1MHz) :
PIN 1-4 (2-3, 5-6-7-8 SHORT) = 1 uH MAX.
- INTERWINDING CAP. (@0.1Vrms, 100KHz) :
PIN 1-8 (1-2-3-4, 5-6-7-8 SHORT) = 75 pF MAX.
- TURN RATIO (@0.1Vrms, 100KHz) :
PIN 1-4:8-5 (2-3,6-7 SHORT) = 1.333 ±1%.
- HI-POT (@1500VAC, 1mA, 2SEC) :
PRI-SEC
- RoHS COMPLIANCE.

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
								ATS-791R
RELEASE		12/14/2005	BART	MICHAEL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		DRAW Pair
						12/14/05		