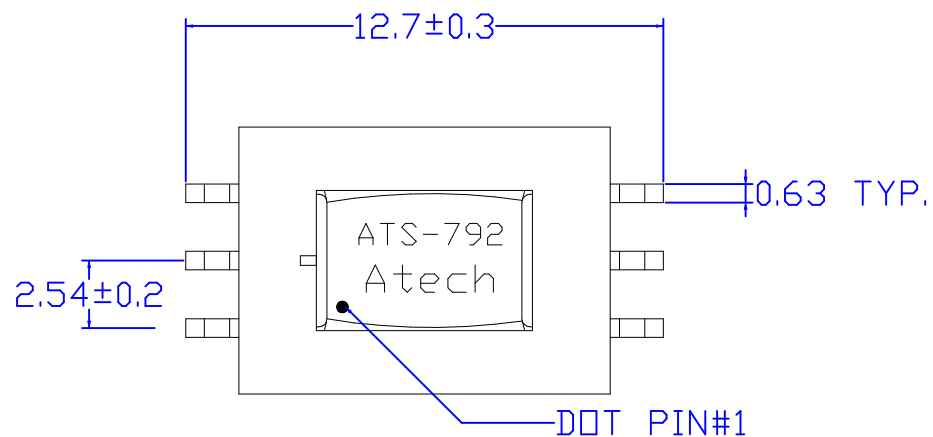


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 127Ω HM $\pm 15\%$.
PIN 4-6 = 150Ω HM $\pm 15\%$.
- INDUCTANCE (@0.1Vrms, 1KHz, PARALLEL) :
PIN 1-3 = 1.55 H MIN.
- IMPEDANCE (@0.1Vrms, 1KHz, PIN 4-6 W/H 346Ω HM) :
PIN 1-3 = 600Ω HM $\pm 5\%$
- INSERTION LOSS (@0 dBm) :
1 KHz = 2.7 dB ± 0.4 dB.
- FREQUENCY RESPONSE (@REF. 1KHz) :
300 Hz = $+0.15$, -0.35 dB.
3.5 KHz = $+0.15$, -0.35 dB.
- RETURN LOSS (@-10 dBm) :
300 Hz = 25 dB MIN.
3.5 KHz = 25 dB MIN.
- LONGITUDINAL BALANCE (@PIN 4-6 W/H 346Ω HM) :
200 Hz = 60 dB MIN.
4 KHz = 60 dB MIN.
- TURN RATIO (@0.1Vrms, 40 KHz) :
PIN 1-3:6-4 = $1 \pm 2\%$.
- HI-POT :
(@1000Vrms, 1mA, 1 MINUTE) : PRI-SEC, PRI-CORE.
(@500 Vrms, 1mA, 1 MINUTE) : SEC-CORE
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600:346 TRANSFORMER		
							DWG. NO. ATS-792R		
A	SPEC.	12/21/2005	BART	LYS	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
	RELEASE	12/07/2005	BART	LYS	SUEDY	DATE 12/07/05			DRAW <i>Pair</i>
NO.	DESCRIPTION	DATE	BY	CHK	APPD				
REVISIONS									