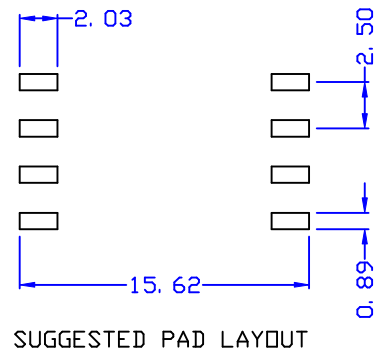
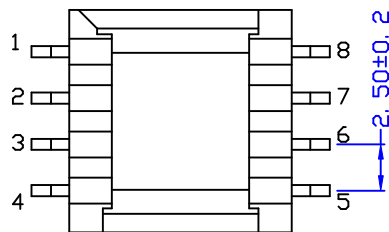
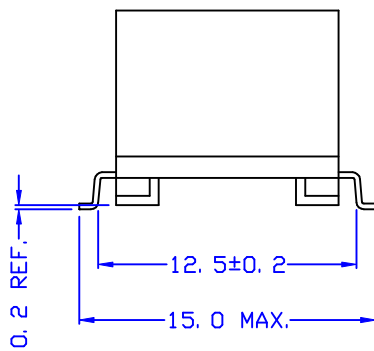
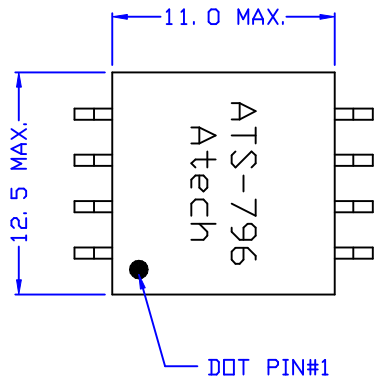


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 2 MAX.
PIN 8-5 (6-7 SHORT) = 2 MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 280 uH ±5%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3, 5-6-7-8 SHORT) = 8 uH MAX.
- INTERWINDING CAP (@10KHz, 0.1Vrms) :
PIN 1-8 (2-3, 6-7 SHORT) = 50 pF MAX.
- TURN RATIO (@900KHz, 0.1Vrms) :
PIN 1-4/8-5 (2-3, 6-7 SHORT) = 1 ±2%.
- INTERWINDING LOSS (@0dBm, W/H PIN 5-8 (6-7 SHORT) = 100 OHM :
100KHz = 1 dB MAX.
- LONGITUDINAL BALANCE : 1.1 MHz = 55 dB MIN.
- THD (@16Vp-p) : 100KHz = -70 dB MAX.
- HI-POT (@2500VAC, 1mA, 2SEC) :
PRI-SEC
- RoHS COMPLIANC.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-796R	
	RELEASE	01/25/2006	BART	VINCEN	SUEYDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 01/25/06		DRAW <i>Pair</i>
REVISIONS								