
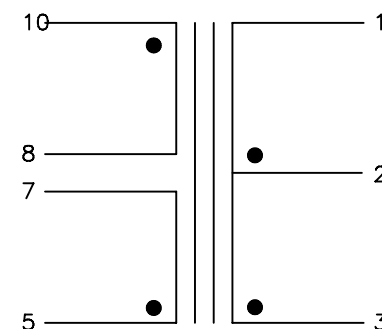
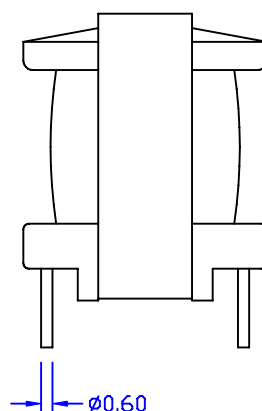
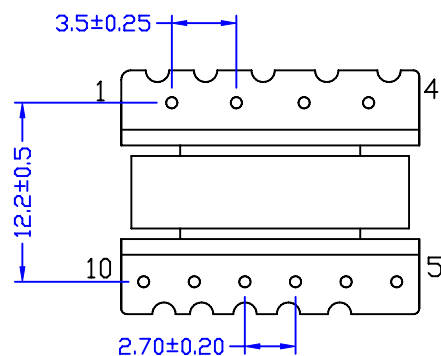
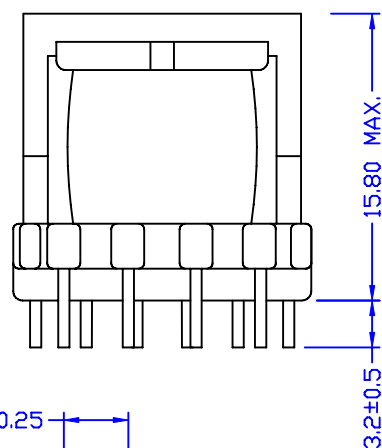


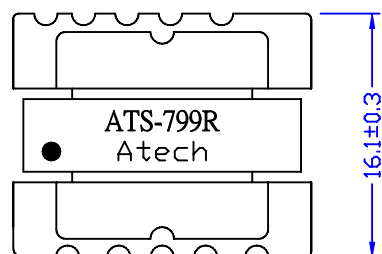

ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 2-1 = 267 mΩ MAX.
PIN 3-2 = 65 mΩ MAX.
PIN 5-7 = 1265 mΩ MAX.
PIN 10-8 = 3764 mΩ MAX.
- INDUCTANCE (@10KHz, 0.1Vrms, ALC OFF) :
PIN 10-8 = 2.5mH±5%
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 10-8 (7-5, 1-2-3 SHORT) = 102 uH MAX.
- INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-5 = 41 pF MAX. PIN 1-10 = 15pF MAX.
- TURN RATIO (@200KHz, 0.1Vrms) :
PIN 10-8 : 2-1 = 11.09±2%
PIN 10-8 : 3-2 = 17.43 ±2%
PIN 10-8 : 5-7 = 4.52±2%
- HI-POT (@500VAC, 1mA, 2SEC) :
PRI-SEC .
- RoHS COMPLIANCE

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
								ATS-799R
A	DIM 16.1 ±0.30	07/17/2006	PAIR	LYS	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	03/27/2006	PAIR	LYS	EUGENE	M/M		
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						03/27/06	CTW016004A	Pair