
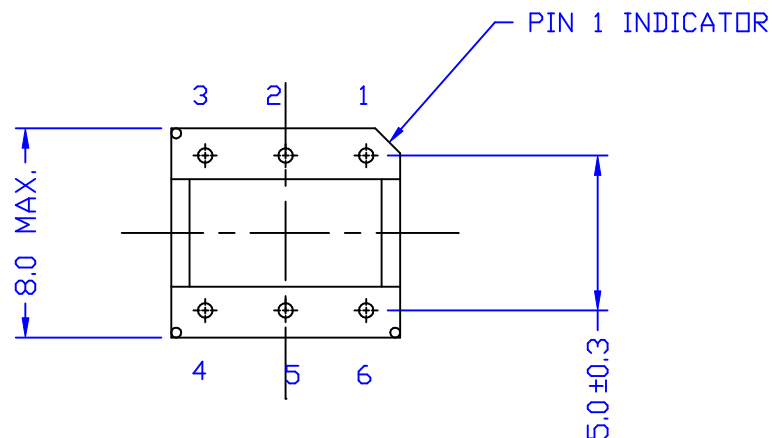
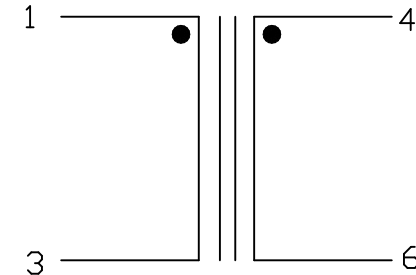


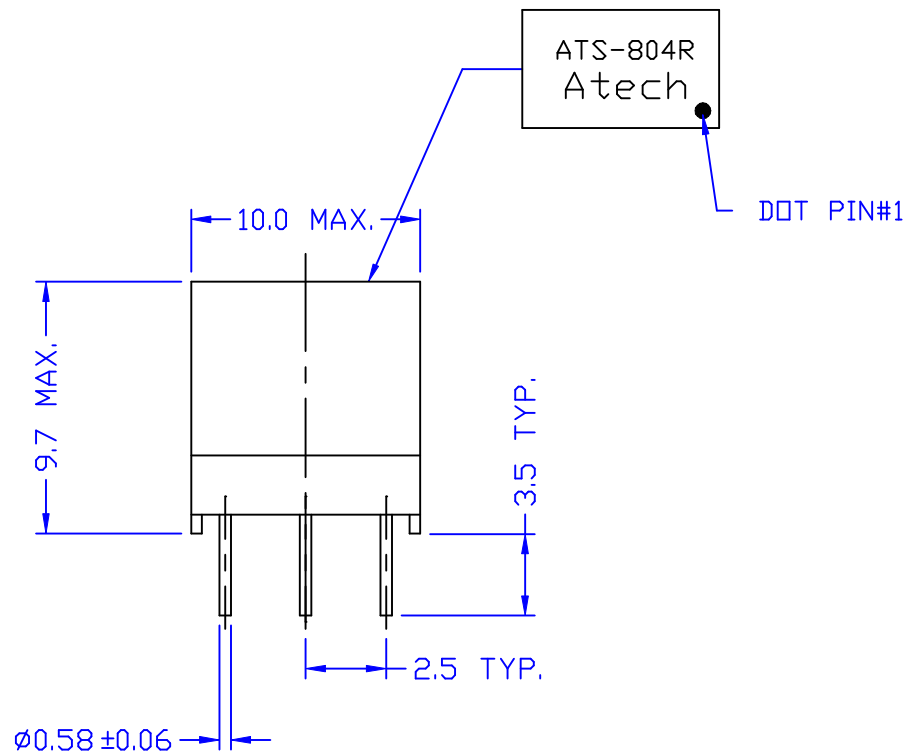

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = $1.25 \pm 10\%$
4-6 = $2.65 \pm 10\%$
- INDUCTANCE (@100KHZ, 100mVAC) :
PIN 1-3 = $500 \mu H \pm 10\%$
- LEAKAGE INDUCTANCE(@100KHZ, 1VAC, 4-6 SHORT) PIN 1-3 = 40 μH MAX.
- INTERWINDIND CAPACITANCE(@100KHZ, 1VAC, 1-3 , 4-6 SHORT)
PIN 1-4 = 3pF MAX.
- TURN RATIO (@400KHZ, 1Vac) : PIN 4-6 : 1-3 = $2 \pm 1\%$
- HI-POT (@500VAC, 1mA, 1SEC) : PIN 1-4 PIN 1-CORE PIN 4 -CORE
- Rohs COMPLIANT

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
								ATS-804R
RELEASE	05/17/2006	PAIR	AL	EUGENE	UNITS:	SAFETY		SHEET OF 1
NO. DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS					DATE	05/17/06		DRAW
								Pair