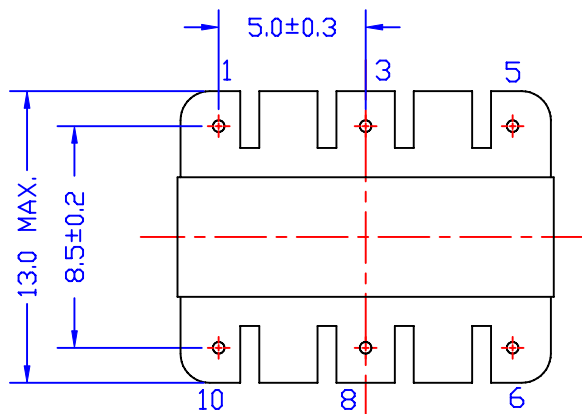
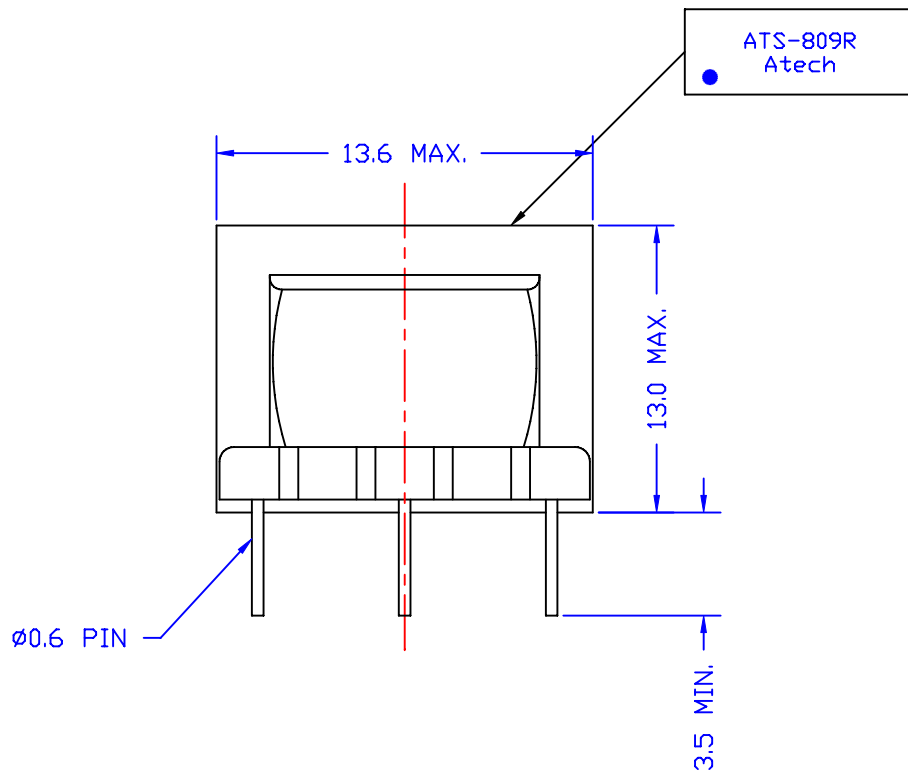


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 65 mOHM MAX., PIN 3-5 = 246 mOHM MAX.
PIN 6-8 = 266 mOHM MAX. PIN 8-10 = 70 mOHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 1-3= 8-10 = 2.8uH $\pm$ 7%
PIN 3-5 = PIN 6-8 = 50.6 uH $\pm$ 7%
- INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 1-6 = 20.5pF MAX.
- TURN RATIO (@800KHZ, 0.1Vrms) : 1-5 : 6-10 = 1 $\pm$ 1%
3-5 : 6-8 = 1 $\pm$ 1%
- HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC
- RoHS COMPLIANT

						Atech [®]		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:022794-6667 FAX:022794-8004		DWG. NO.
								ATS-809R
A	L TOLERANCE	03/24/2008	Pair	Michael	Eugene	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	06/09/2006	PAIR	AL	EUGENE	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						06/09/06	CTA013014A	Pair