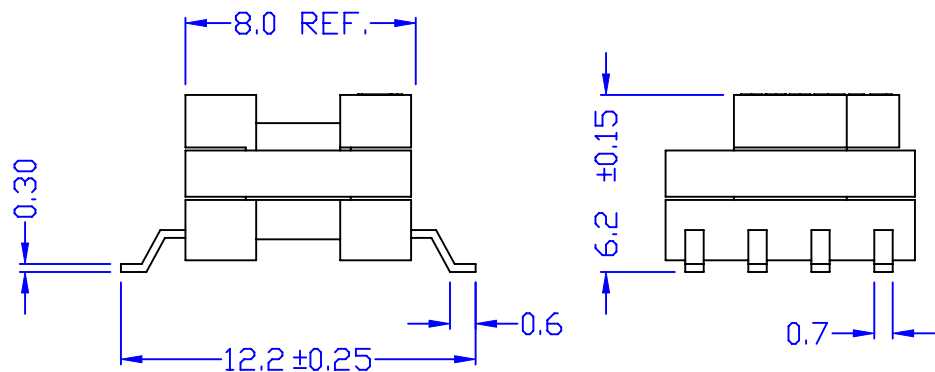
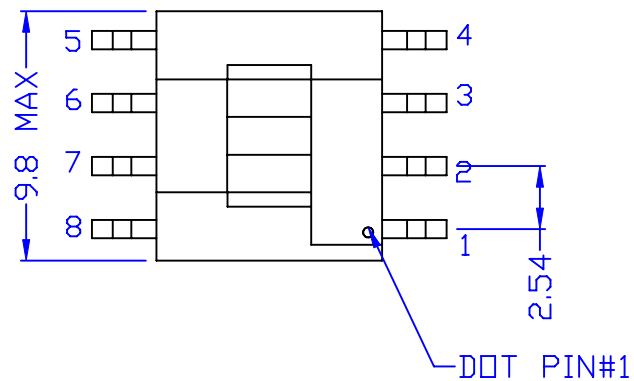
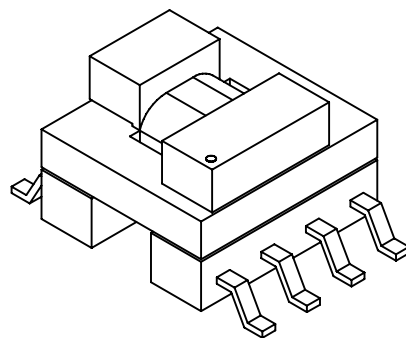


ELECTRICAL SPECIFICATION :

- D.C.R : 3-5 = 0.055 Ω M MAX. 5-4 = 0.06 Ω M MAX.
1-8 = 0.4 Ω M MAX. 8-2 = 0.44 Ω M MAX.
2-7 = 0.48 Ω M MAX.
- L : (<@100KHZ,100mV) 3-4 = 3.02 μ H+/-10%
- LEAKAGE INDUCTANCE : (<@140KHZ, 100mV)3-4 = 0.3 μ H MAX.(1,2,7,8 SHORT)
- TURN RATIO(<@100KHZ, 100mV) 1-8 : 2-7 = 1.07+/-7%
1-8 : 8-2 = 1.07+/-7%
1-8 : 3-5 = 2.8+/-7%
1-8 : 5-4 = 2.8+/-7%
- HI-POT(<@500 VAC, 1mA Ss)1-4
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER
							DWG. NO. ATS-810R
A	DIM 9.8MA X.& 12.2±.25	08/15 /2007	PAIR	VINCENT	EUGENE	UNITS: M/M	SAFETY
	RELEASE	05/26 /2006	PAIR	VINCENT	EUGENE	DATE	SHEET 1OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	P/N:	DRAW
REVISIONS						05/26/06	CTX008001A <i>Pair</i>