

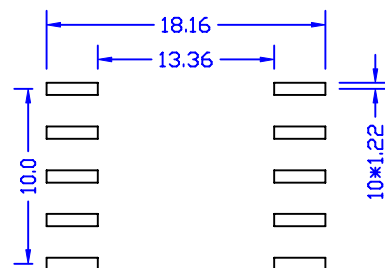
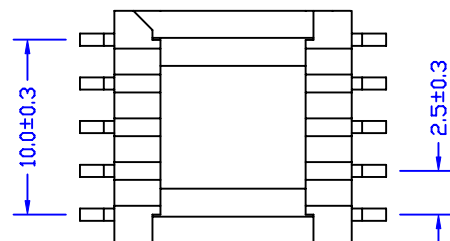



DOT PIN#1

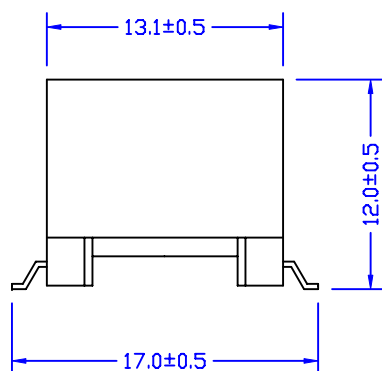

PCB LAYOUT

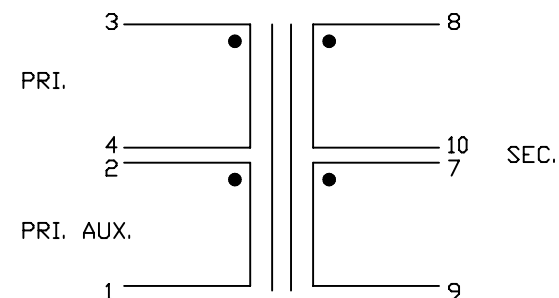

## ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 270m OHM MAX.  
PIN 3-4 = 100m OHM MAX.  
PIN 7-9 (7-8,9-10 SHORT) = 75m OHM MAX.
- INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 3-4 = 77.4uH ±10%
- LEAKAGE INDUCTANCE (@200KHZ, 0.1Vrms)  
PIN 3-4 (1-2,7-8-9-10 SHORT) = 5uH MAX.
- TURN RATIO (@5KHZ, 0.1Vrms) : PIN 3-4 : 8-10 = 1.467 ±2%(7-8,9-10 SHORT)  
PIN 3-4 : 2-1 = 1.467 ±2%
- HI-POT (@1.5KVAC, 1mA, 2SEC) : PIN 3-8  
(@500VDC, 1mA, 2SEC) : PIN 3-1
- RoHS COMPLIANT

|           |  |  |  |  |  |                                   |  |              |
|-----------|--|--|--|--|--|-----------------------------------|--|--------------|
|           |  |  |  |  |  | <b>Atech®</b>                     |  | TITLE        |
|           |  |  |  |  |  | Atech Technology Co., Ltd.        |  | TRANSFORMER  |
|           |  |  |  |  |  | TEL:02)2794-6667 FAX:02)2794-8004 |  | DWG. NO.     |
|           |  |  |  |  |  | UNITS: M/M                        |  | ATS-815R     |
|           |  |  |  |  |  | DATE                              |  | SHEET 1 OF 1 |
| REVISIONS |  |  |  |  |  | 07/14/06                          |  | DRAW         |
|           |  |  |  |  |  |                                   |  | Pair         |