

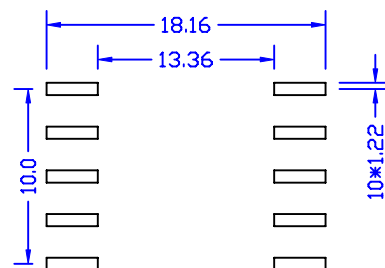
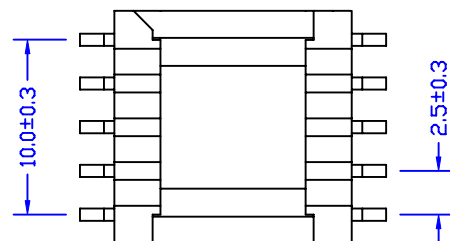



DOT PIN#1

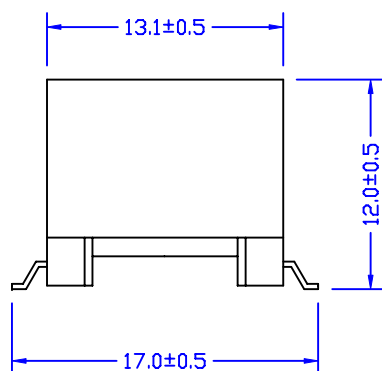

PCB LAYOUT

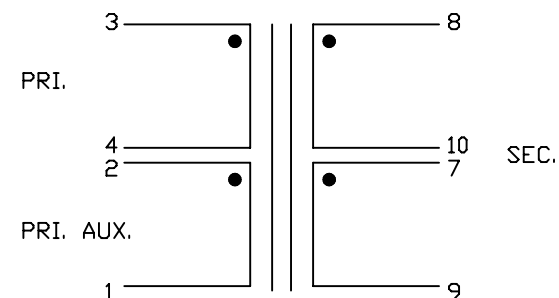

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 270m OHM MAX.
PIN 3-4 = 100m OHM MAX.
PIN 7-9 (7-8,9-10 SHORT) = 8.5m OHM MAX.
- INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 3-4 = 77.4uH ±10%
- LEAKAGE INDUCTANCE (@200KHZ, 0.1Vrms)
PIN 3-4 (1-2,7-8-9-10 SHORT) = 5uH MAX.
- TURN RATIO (@5KHZ, 0.1Vrms) : PIN 3-4 : 8-10 = 5.5 ±2%(7-8,9-10 SHORT)
PIN 3-4 : 2-1 = 1.467 ±2%
- HI-POT (@1.5KVAC, 1mA, 2SEC) : PIN 3-8
(@500VDC,1mA,2SEC): PIN 3-1
- RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
						UNITS: M/M		ATS-816R
						DATE		SHEET 1 OF 1
REVISIONS						07/14/06		DRAW
NO.	DESCRIPTION	DATE	BY	CHK	APPD	SAFETY		Pair
	RELEASE	07/14/2006	PAIR	MIC	EUGENE			