
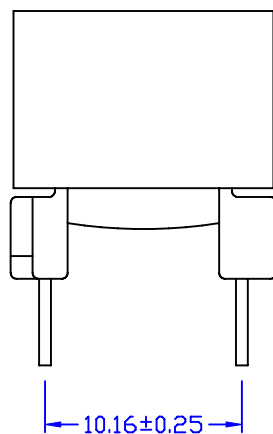
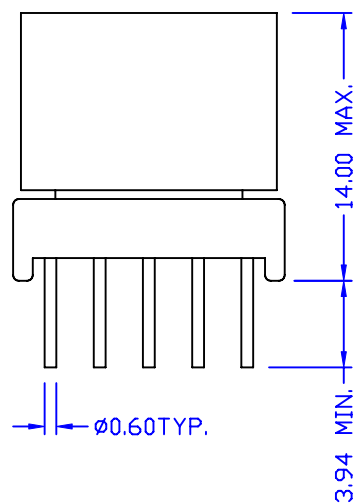
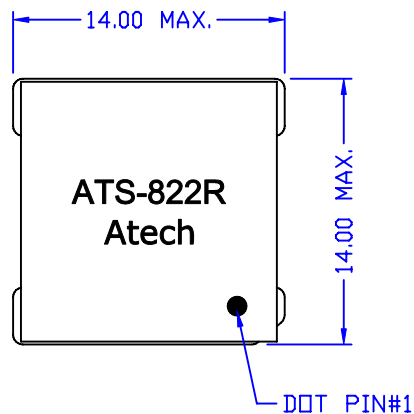


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-4 = $620 \text{ m}\Omega \pm 10\%$
PIN 2-5 = $620 \text{ m}\Omega \pm 10\%$
PIN 6-9 = $310 \text{ m}\Omega \pm 10\%$
PIN 7-10 = $220 \text{ m}\Omega \pm 10\%$
- INDUCTANCE (@10KHz, 0.1Vrms, 2-4 SHORT, ALC=OFF) :
PIN 1-5 = $410 \text{ }\mu\text{H} \pm 5\%$.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms, 6-7-9-10, 2-4 SHORT)
PIN 1-5 = $10 \text{ }\mu\text{H MAX.}$
- TURNS RATIO (@20KHz, 1Vrms, 2-4, 7-9 SHORT) :
PIN 1-5:10-6 = $2 \pm 3\%$
- HI-POT (@1875VAC, 1mA, 2SEC) :
PRI-SEC
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-822R	
	RELEASE	09/05 /2006	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	SHEET 1 OF 1
REVISIONS						09/05/06	CTA41303EA	DRAW <i>Pair</i>