
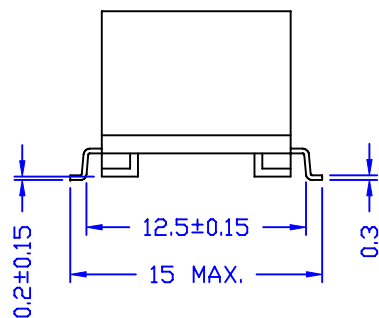
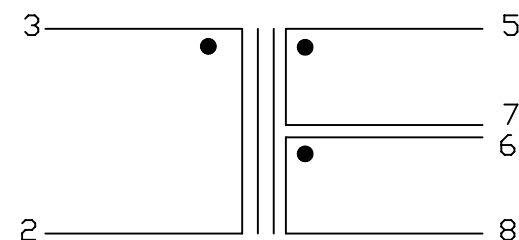

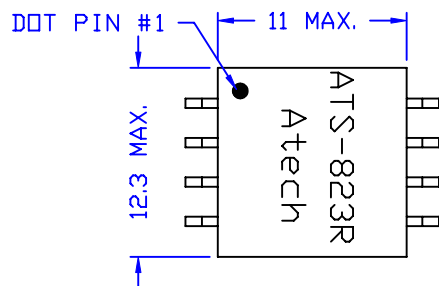


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-2 = 98 mOHM MAX.
PIN 5-7 = 62 mOHM MAX.
PIN 6-8 = 62 mOHM MAX.
- INDUCTANCE (@400KHZ, 0.4Vrms,ALC= OFF) : PIN 2-3 = 40uH±10%
(W/H 1.3A) PIN 2-3 = 36uH MIN.
- LEAKAGE INDUCTANCE (@400KHZ, 0.4Vrms) : PIN 2-3 (5-6-7-8 SHORT) = 395uH MAX.
- TURN RATIO (@400KHZ, 0.4Vrms) : PIN 3-2 : 5-7 = 3.33±3%(5-6,7-8 SHORT)
- HI-POT (@1500VAC, 1mA, 2SEC) : PRI-SEC (6-7 SHORT)
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-823R	
	RELEASE	09/12/2006	PAIR	WILLIE	EUGENE	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/12/06			
REVISIONS								SHEET 1 OF 1	
								DRAW <i>Pair</i>	