
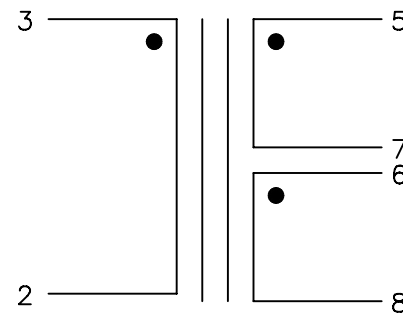


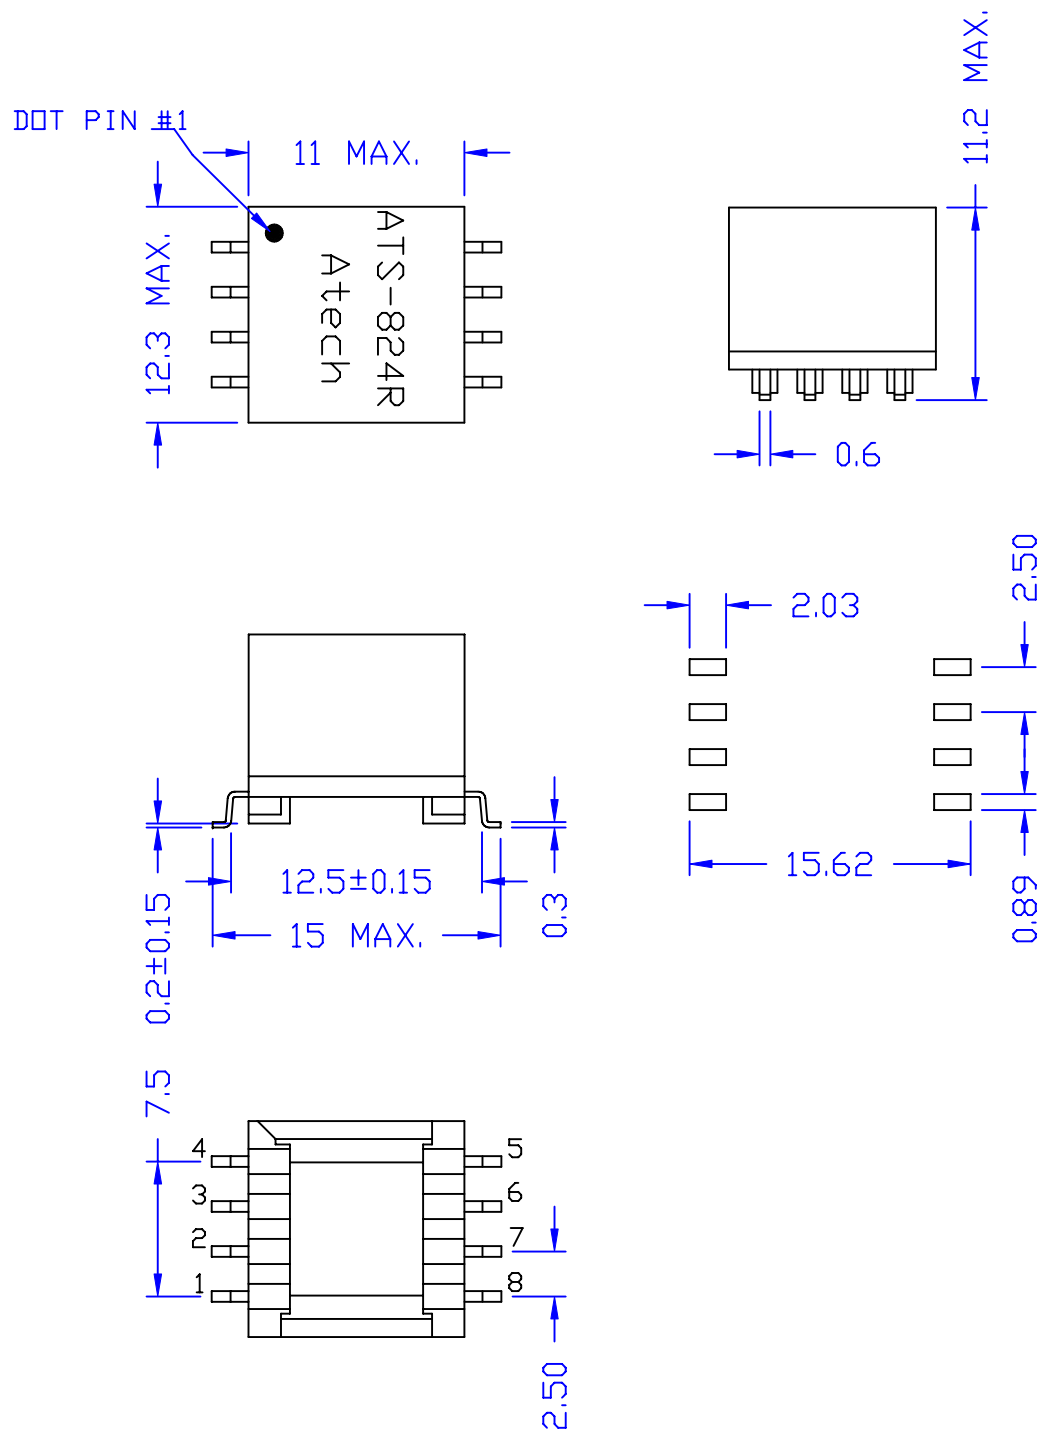

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-3 = 98 mOHM MAX.
PIN 5-7 = 85 mOHM MAX.
PIN 6-8 = 85 mOHM MAX.
- INDUCTANCE (@400KHZ, 0.4Vrms, ALC OFF) :
PIN 2-3 = 40uH±5 %
(@400KHZ, 0.4Vrms 1.3A,ALC= OFF)
PIN 2-3 = 36uH MIN.
- LEAKAGE INDUCTANCE (@400KHZ, 0.4Vrms) :
PIN 2-3 (5-6-7-8 SHORT) = 0.37uH MAX.
- TURN RATIO (@400KHZ, 0.4Vrms,5-6, 7-8 SHORT) :
PIN 3-2 : 5-7 = 2.5 ± 3%
- HI-POT (@1500VAC, 1mA, 2SEC) : PRI-SEC (6-7 SHORT)
- RoHS COMPLIANT

						Atech® Atech Technology Co. Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-824R	
	RELEASE	09/14/2006	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						09/14/06			