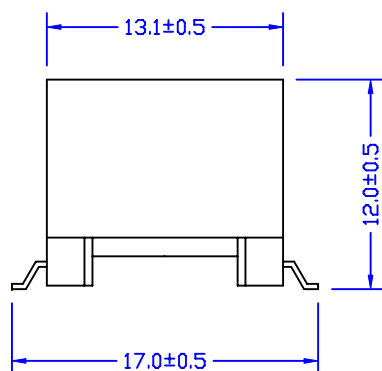
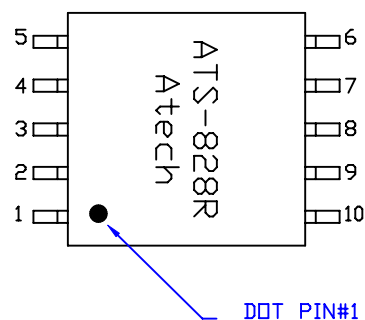


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 1 Ω HM MAX.
PIN 9-7 = 10-8 = 150m Ω HM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4(2-3 SHORT) = 400uH $\pm 5\%$
- LEAKAGE INDUCTANCE(@100KHZ, 0.1Vrms) :
PIN 1-4(2-3 , 7-8-9-10 SHORT) = 2.5uH MAX.
- THD (@100HZ, 5Vrms) :
PIN 1-4 (2-3 , 8-9 SHORT 7-10 W/H 12.7 Ω HM) = -80dB MAX.
- TURN RATIO (@10KHZ, 0.1Vrms) :
PIN 1-3 : 2-4 = 1 $\pm 2\%$
PIN 1-3 : 9-7 = 2.8 $\pm 2\%$
PIN 1-3 : 10-8 = 2.8 $\pm 2\%$
- HI-POT (@1875VAC, 0.5mA, 1SEC) : PIN 1-10(2-3, 8-9, SHORT)
- RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
								ATS-828R
RELEASE		11/22/2006	PAIR	VINCENT	TEUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	DRAW
						11/22/06	CTP413002A	Pair