
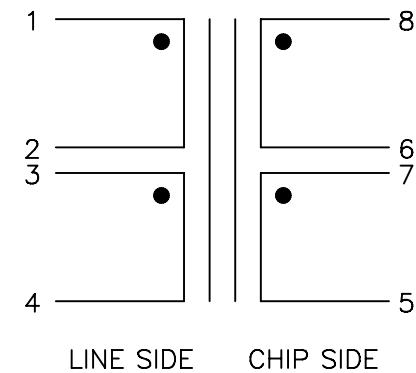
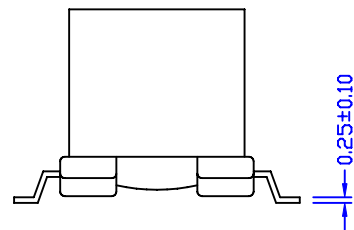
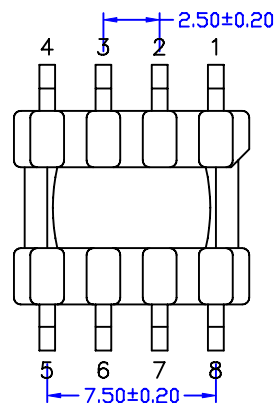



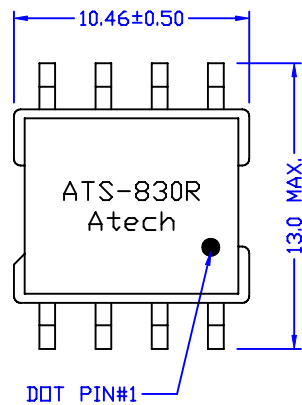

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 2.3 OHM MAX.
PIN 8-5 (6-7 SHORT) = 2.85 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 800uH $\pm$ 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3 5-6-7-8 SHORT) = 0.85uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-8 (2-3 6-7 SHORT) = 55pF MAX.
- TURN RATIO (@800KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 8-5 (6-7 SHORT) = 1.13 $\pm$ 2%
- HI-POT (@1875KVAC, 1mA, 1SEC) : PIN 1-8 (2-3 6-7 SHORT)
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-830R	
	RELEASE	12/13/2006	PAIR	VINCENT	EUGENE			UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	12/13/06	DRAW Pair	
REVISIONS									