

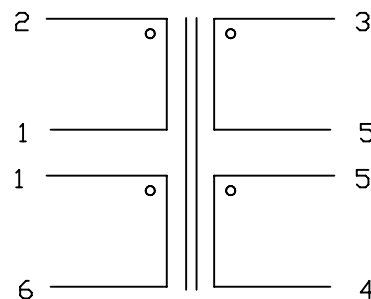
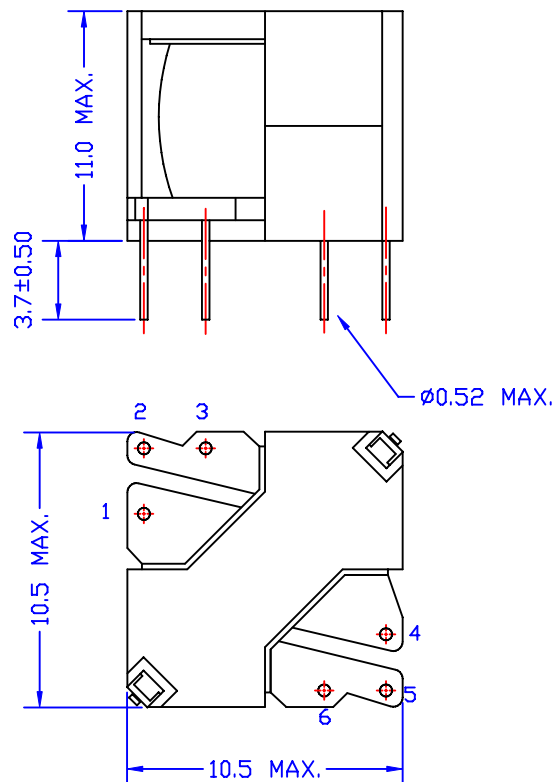


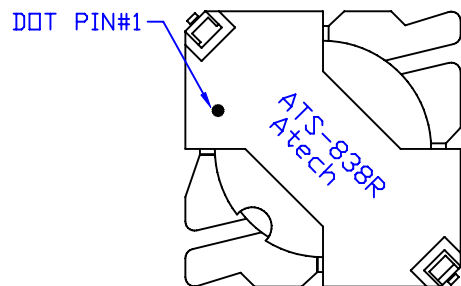

ELECTRICAL CHARACTERISTICS:

- D.C.R. : 1-2 = 2.82 OHM ±12%
1-6 = 3.14 OHM ±12%
3-5 = 3.45 OHM ±12%
5-4 = 3.74 OHM ±12%
- INDUCTANCE : (@10KHZ, 0.1 Vrms)
1-2 = 10.88mH ±30%
1-6 = 10.88mH ±30%
3-5 = 10.88mH ±30%
5-4 = 10.88mH ±30%
- TURN RATIO (@100KHZ, 0.1Vrms)
2-1 : 1-6 = 1±2%
2-1 : 3-5 = 1±2%
2-1 : 5-4 = 1±2%
- HI-POT (@#0.5KVAC, 1mA, 2S) PRI-SEC
- RoHS COMPLIANT

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE E1 TRANSFORMER	
								DWG. NO. ATS-838R	
	RELEASE	01/29/2007	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						01/29/07			