
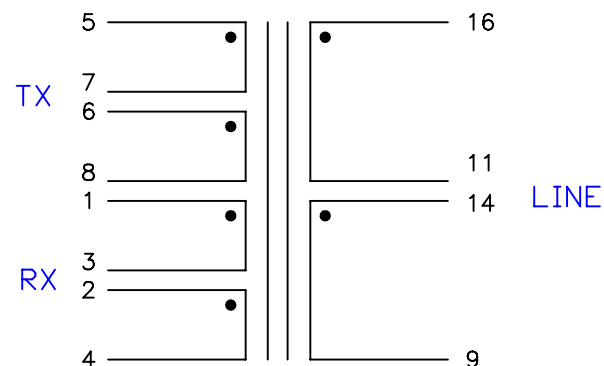
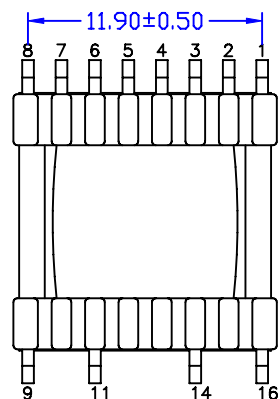




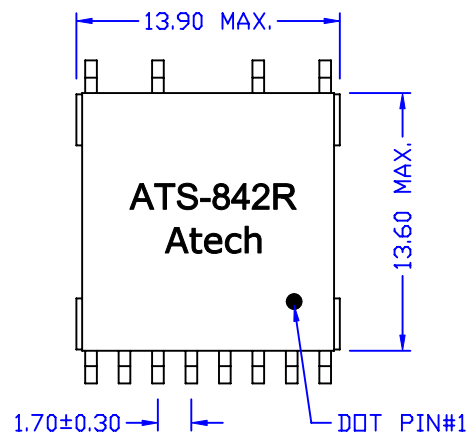

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 4.35 OHM±15%(2-3 SHORT)
PIN 5-8 = 0.37 OHM±15%(6-7 SHORT)
PIN 16-9 = 2.15 OHM±15%(11-14 SHORT)
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 16-9 (11-14 SHORT) : = 400 uH ±5%.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 16-9 (11-14,1-2-3-4,5-6-7-8,SHORT) = 4.2uH MAX.
PIN 5-8 (6-7,1-2-3-4,9-11-14-16, SHORT) = 1.6uH MAX.
PIN 1-4 (2-3,5-6-7-8,9-11-14-16, SHORT) = 9.5uH MAX.
- LONGITUDINAL BAL.(@2.2M):
PIN 16-9(6-7,SHORT) = 50dB MIN.
- T.H.D. (@25KHZ, 2Vrms) = -90dB MAX.
- TURN RATIO(@100KHZ,0.1Vrms) :
PIN 16-9(11-14,SHORT) : 5-8(6-7,SHORT) = 2.5±2%
PIN 16-9(11-14,SHORT) : 1-4(2-3,SHORT) = 1±2%
- HI-POT : (@1.5KVAC, 1mA, 2S)
PIN 1-16(2-3,4-5,6-7,11-14,SHORT)
- RoHS COMPLIANCE.

						Atech®		TITLE	T1
						Atech Technology Co., Ltd.		TRANSFORMER	
						TEL:022794-6667 FAX:022794-8004		DWG. NO.	ATS-842R
						UNITS:	SAFETY	SHEET 1 OF 1	
						M/M		DRAW	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	Pair	
REVISIONS						03/20/07			