
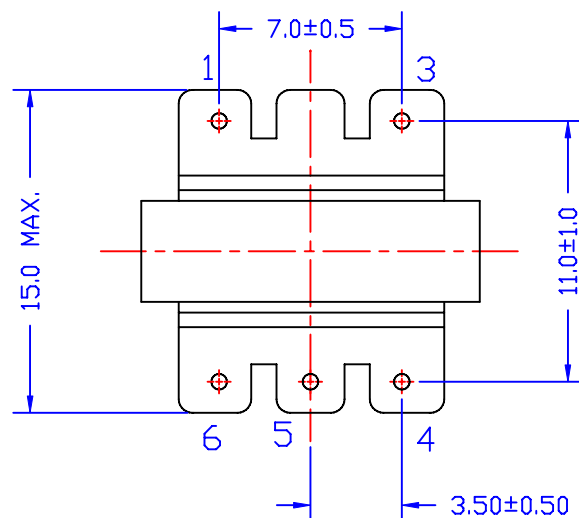
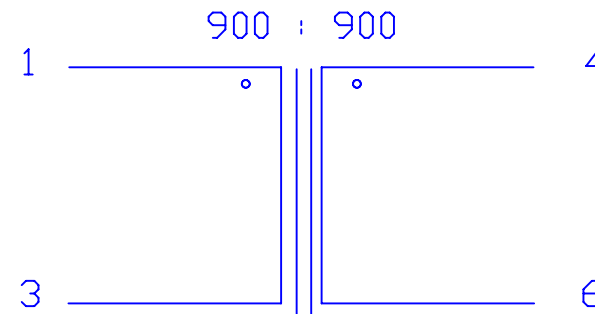


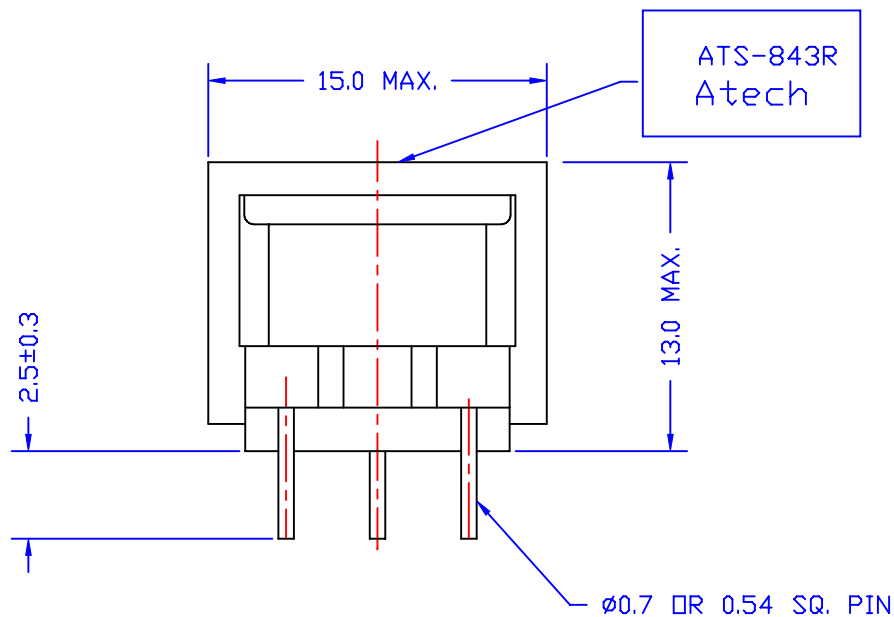

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 60 Ω M MAX. , PIN 4-6 = 76 Ω M MAX.
2. PARALLEL INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 3.2H MIN.
3. IMPEDANCE (@1KHZ, 1Vrms, 4-6 W/H 900 Ω M)
PIN 1-3 = 900 Ω M $\pm$ 10%
4. INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 900 Ω M) : 1dB MAX.
5. FREQ. RESP.(REF. 1KHZ): @300HZ = $\pm$ 0.35dB
@4KHZ = $\pm$ 0.35dB
6. RETURN LOSS (REF. 900 Ω M) : @300HZ~4KHZ = 22 dB MIN.
7. TURNS RATIO (@15KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 1%
8. HI-POT(1200VAC, 1mA, 1MINUTE) : PIN 1-4
9. RoHS COMPLIANT

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 900 : 900 TRANSFORMER	
								DWG. NO. ATS-843R	
	RELEASE	03/06/2007	PAIR		SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						03/06/07		SHEET 1 OF 1	
								DRAW <i>Pair</i>	