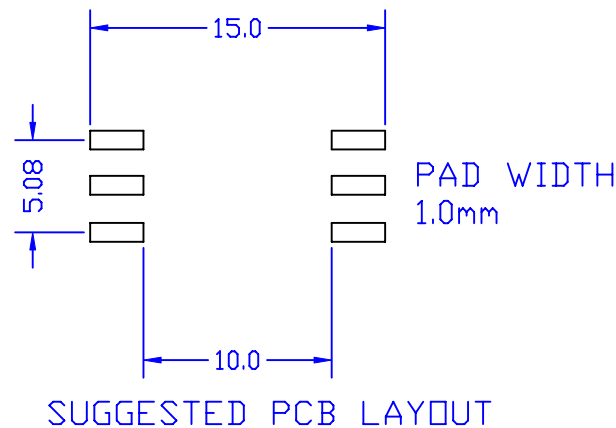
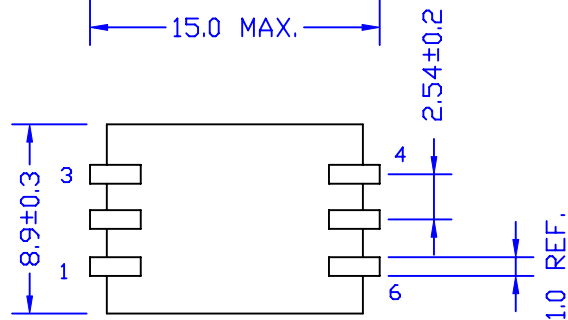


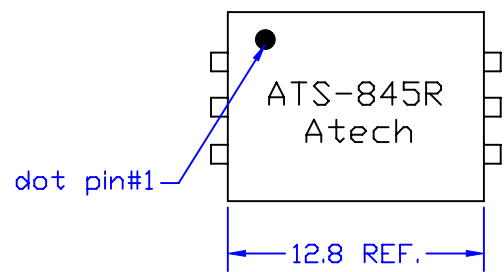


ELECTRICAL CHARACTERISTICS :

- DCR: PIN 1-3 = 4-6 = 93.5 Ω ± 12%
- INDUCTANCE (@200HZ, 5mVrms)
PIN 1-3 = 4-6 = 1.1 H MIN.
- LEAKAGE INDUCTANCE (@1KHZ, 5mVrms, 4-6 SHORT) :
PIN 1-3 = 3.6 mH MAX.
- INSERTION LOSS(1-3 W/H 600 Ω, 6.8μF, 4-6 W/H 470 Ω)
@2KHZ = 3.5dB MAX.
- FREQ.RESP.(REF.2KHZ)
(@200HZ) = ±0.25dB (@4KHZ) = ±0.25dB
- RETURN LOSS(1-3 W/H 600 Ω, 6.8μF 4-6 W/H 470 Ω)
@200HZ = 18dB MIN.
@4KHZ = 18dB MIN.
- T.H.D(@500HZ, 0dBm) = -50dBm MAX.
- LONGITUDINAL BAL. : @5KHZ = 80dB MIN.
- TURN RATIO : 3-1 : 4-6 = 1±1%
- HI-POT : (@4.6KVAC, 1mA, 2S) P-S
- RoHS COMPLIANCE.

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-845R	
	RELEASE	03/23/2007	PAIR	VINCENT	EUGENE	M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						03/22/07			<i>Pair</i>