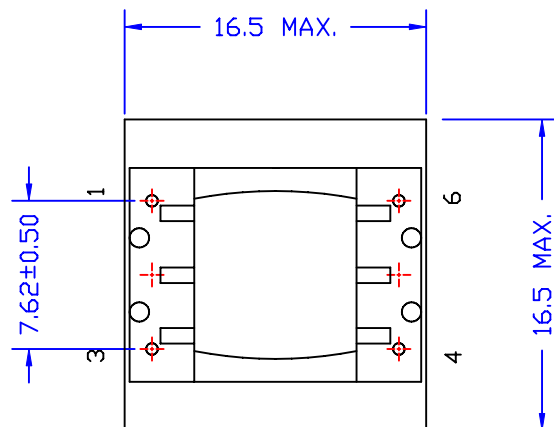
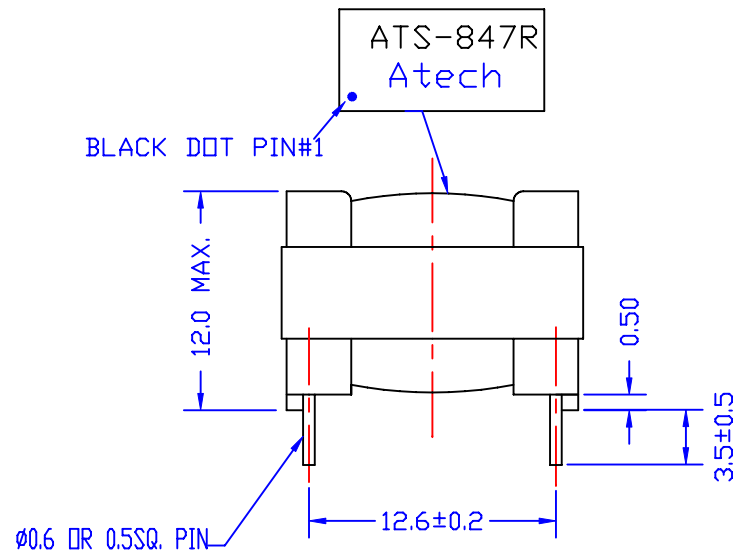


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 80 Ω HM $\pm$ 15% PIN 6-4 = 80 Ω HM $\pm$ 15%
2. INDUCTANCE (@200HZ, 1Vrms, PARALLEL): PIN 1-3 = 7H MIN.
3. RETURN LOSS : (REF. 600 Ω HM) 200 TO 4KHZ = 20dB MIN.
4. INSERTION LOSS : (1KHZ, 0dBm) 3dB MAX.
5. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = $\pm$ 0.2dB
6. IMPEDANCE (@1KHZ, 1Vrms, SERIES):
PIN1-3 = 600 Ω HM $\pm$ 15% (PIN 4-6 W/H 600 Ω HM LOAD)
7. TURN RATIO : (10KHZ, 1Vrms) PIN 6-4 : 1-3 = 1.13 $\pm$ 2%
8. HI-POT : (@1250VAC, 1mA, 2SEC) PRI-SEC
9. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 600 TRANSFORMER	
								DWG. NO. ATS-847R	
	RELEASE	04/19/2007	PAIR		SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						04/19/07		SHEET 1 OF 1	
								DRAW <i>Pair</i>	