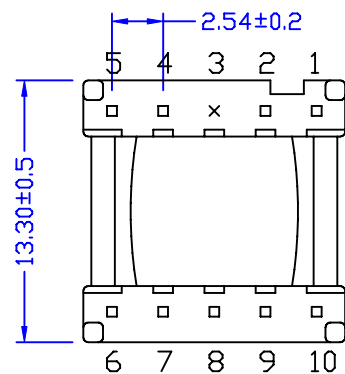
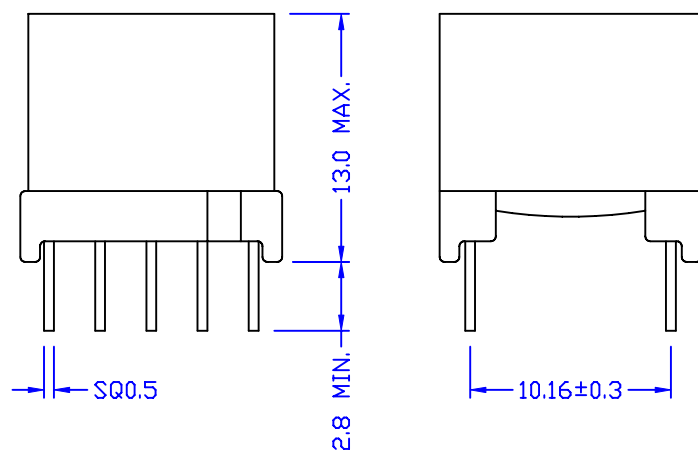
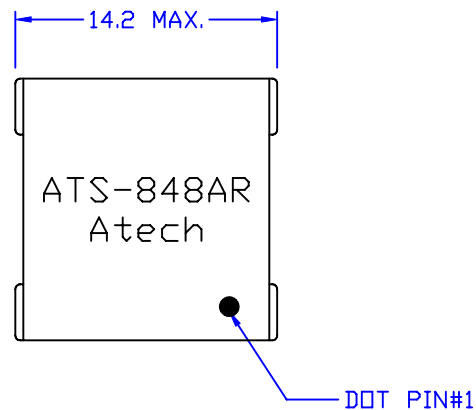


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-4 = 790 mΩ MAX.
PIN 2-5 = 790 mΩ MAX.
PIN 9-6 = 450 mΩ MAX.
PIN 10-7 = 350 mΩ MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-5<2-4 SHORT> = 410 μH±10%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms)
PIN 1-5 <2-4, 6-7-9-10 SHORT> = 10 μH MAX.
- TURNS RATIO (@20KHz, 1Vrms) :
PIN 1-5<2-4 SHORT>:10-6 <7-9 SHORT>= 1.6±2%
- HI-POT (@1875VAC, 1mA, 2S) : 1-10(2-4,7-9 SHORT)
- RoHS COMPLIANT.

						Atech®		TITLE ADSL2 ⁺
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
								ATS-848AR
RELEASE		01/03/2008	PAIR	Willie	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		DRAW
						01/03/08		Pair