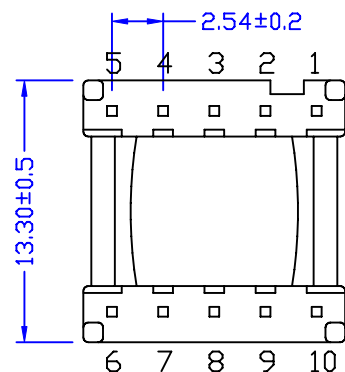
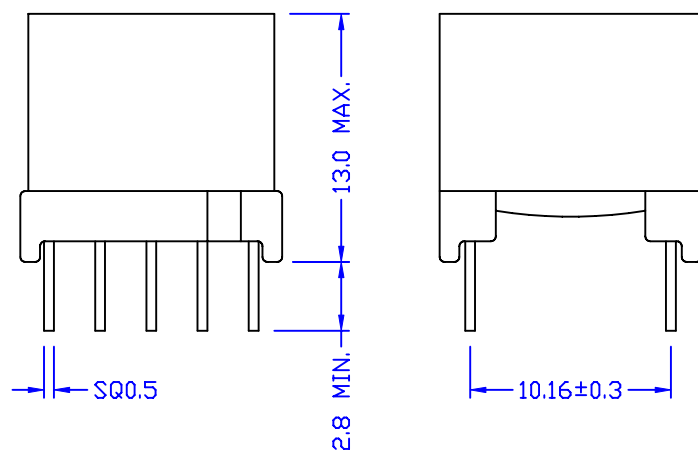
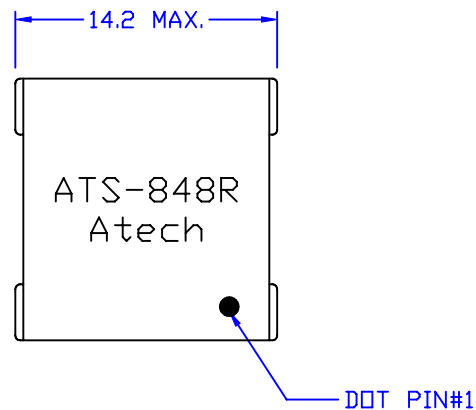


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-4 = 790 mΩ MAX.
PIN 2-5 = 790 mΩ MAX.
PIN 9-6 = 450 mΩ MAX.
PIN 10-7 = 350 mΩ MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 410 μH±10%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms)
PIN 1-5 (2-4, 6-7-9-10 SHORT) = 10 μH MAX.
- TURNS RATIO (@20KHz, 1Vrms) :
PIN 1-5 (2-4 SHORT):10-6 (7-9 SHORT)= 1.6±2%
- HI-POT (@1875VAC, 1mA, 2S) : 1-10(2-4,7-9 SHORT)
- RoHS COMPLIANT.

						Atech®		TITLE ADSL2 ⁺
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
						UNITS: M/M		ATS-848R
						SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						04/19/07		Pair