
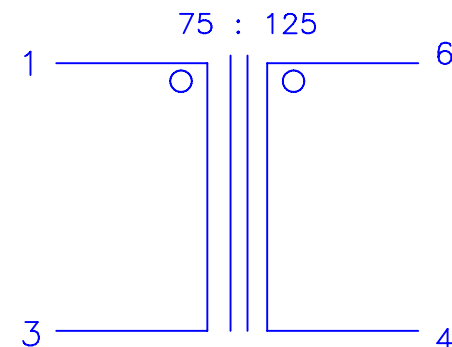


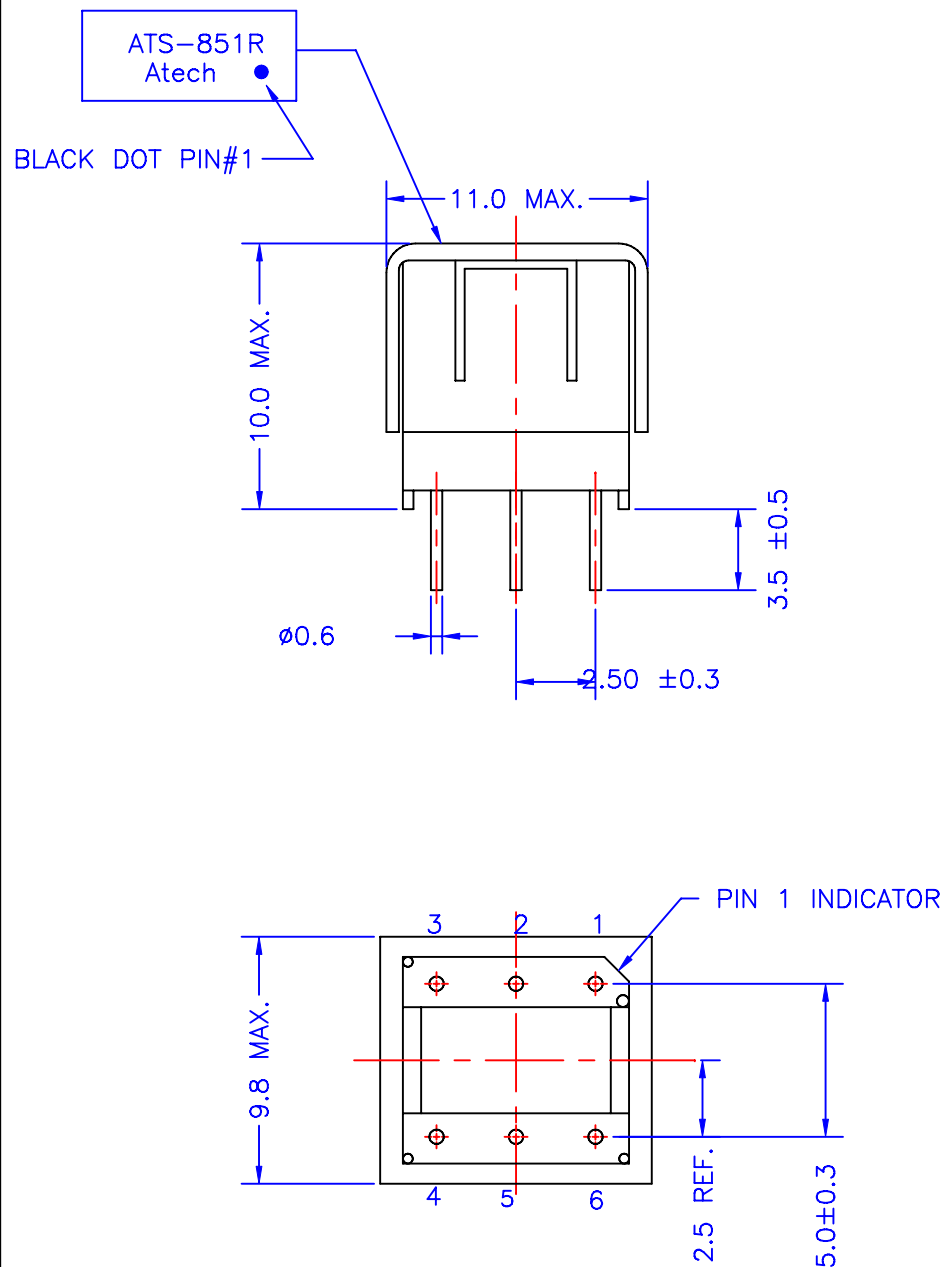

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN1-3 = 500 mOHM MAX. PIN 4-6 = 722 mOHM MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 1-3 = 1.6mH MIN.
3. INSERTION LOSS:(@10MHZ, -10dBm, 125 OHM LOAD)
PIN 1-3 = 3.5dB MAX.
4. FREQ. RESP(@REF. 10MHZ)
5MHZ = +/-2.5dB 20MHZ = +/-2.5dB 30MHZ = +/-2.5dB
5. RETURN LOSS: (@5-30MHZ,REF 750 OHM)
PIN 1-3 = 20dB MIN.
7. TURNS RATIO:(@100KHZ, 0.1Vrms) 6-4 : 1-3 = 1.285 +/-1%
8. HI-POT (@1KVAC, 1mA, 2SEC) PRI-SEC
9. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 75:125 TRANSFORMER	
							DWG. NO. ATS-851R	
	RELEASE	05/03/2007	PAIR	WILLIE	SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1
REVISIONS						05/03/07		DRAW <i>Pair</i>