

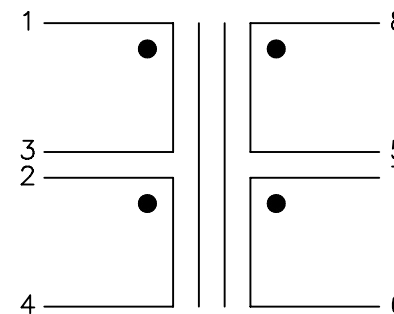
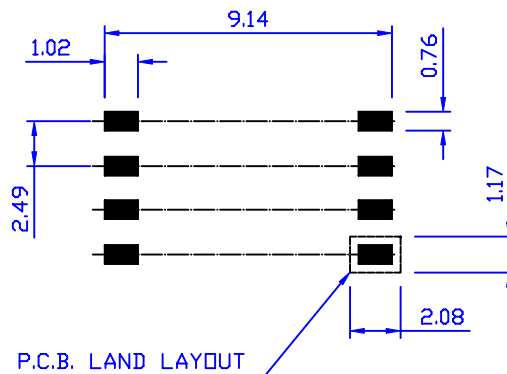
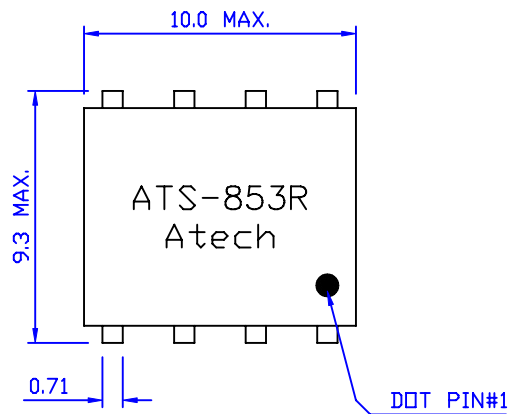


ELECTRICAL CHARACTERISTICS :

- DCR : (<@2-3 SHORT> 1-4 = 1.5 OHM MAX.
<@5-7 SHORT> 8-6 = 4.0 OHM MAX.
- INDUCTANCE :
<@10KHZ, 0.1Vrms> PIN 1-4 (<2-3 SHORT>) = 750uH ± 7%
- LEAKAGE INDUCTANCE (<@100KHZ, 0.1Vrms> :
PIN 1-4 (<2-3 5-8 7-6 SHORT>) = 10.5uH MAX.
- TURN RATIO : (<@10KHZ, 0.1Vrms>) PIN 1-4 : 8-6 (<2-3 5-7 SHORT>) = 0.408 ± 1%
- HI-POT : (<@1500VAC, 0.5mA, 1SEC>) : PIN 1-8
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE TRANSFORMER	
A	D.C.R 8-6	07/27/2007	PAIR	WILLIE	EUGENE		DWG. NO. ATS-853R	
	RELEASE	06/15/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTA40700KA	DRAW <i>Pair</i>
REVISIONS						06/15/07		