
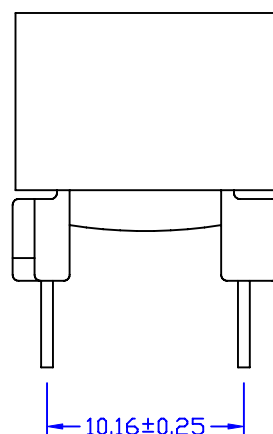
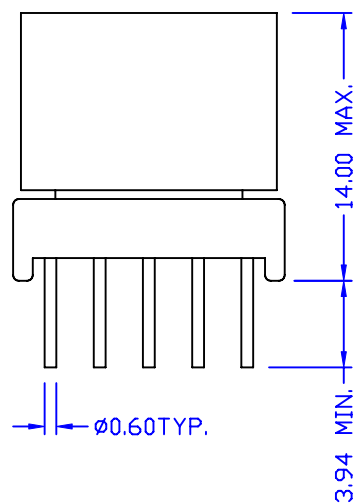
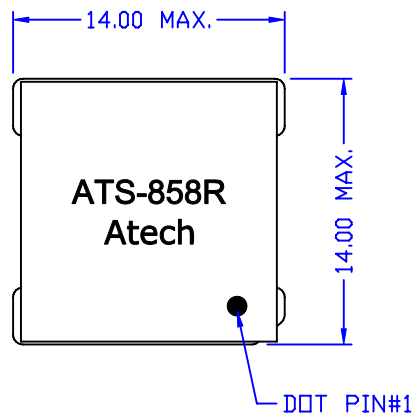


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-3 = 1.1 OHM ±15%
PIN 2-4 = 1.1 OHM ±15%
PIN 7-9 = 1.1 OHM ±15%
PIN 8-10 = 1.1 OHM ±15%
- INDUCTANCE (@10KHz, 0.1Vrms, 8-9 SHORT) :
PIN 10-7 = 5 mH ±10%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms, 2-3,8-9,10-7 SHORT)
PIN 1-4 = 10 uH MAX.
- INTERWINDING CAP(@10KHZ,0.1Vrms,2-3,8-9, SHORT)
PIN 1-10 = 60pF MAX.
- T.H.D (@30KHx,2Vrms,2-3,8-9 SHORT) : PIN 7-10 = -75dB MAX.
- URNS RATIO (@10KHz, 0.1Vrms, 2-3,8-9 SHORT) :
PIN 10-7 : 1-4 = 2±1%
- HI-POT (@1875VAC, 1mA, 2SEC) : PIN 1-10
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:0272794-6667 FAX:0272794-8004		TITLE		ADSL TRANSFORMER	
								DWG. NO.		ATS-858R	
	RELEASE	06/29/2007	PAIR	WILLIE	EUGENE	UNITS: M/M		SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:		DRAW <i>Pair</i>	
REVISIONS						06/29/07					