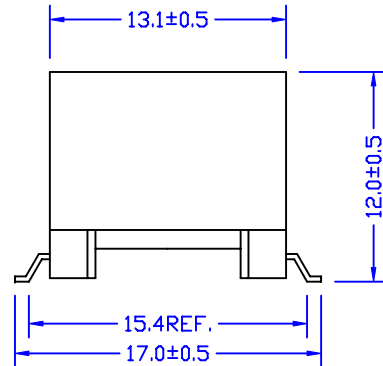
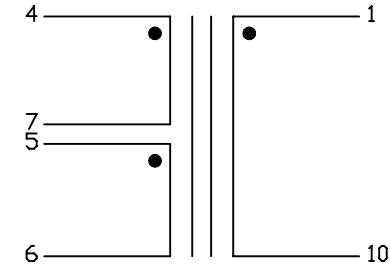
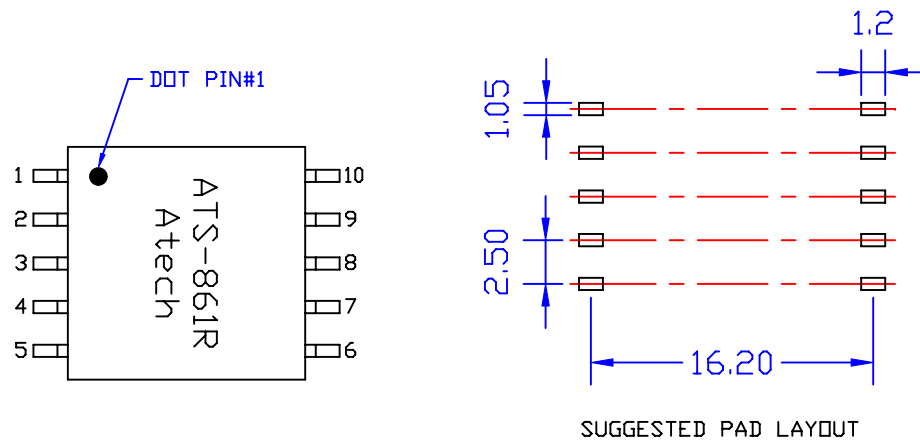


## ELECTRICAL CHARACTERISTICS : <50819R COMPATIBLE>

- DCR : PIN 1-10 = 285 OHM  $\pm$  20%  
PIN 4-7 = 32 OHM  $\pm$  20%  
PIN 5-6 = 32 OHM  $\pm$  20%
- INDUCTANCE (@100KHZ, 0.1Vrms 4-5,6-7 SHORT) : PIN 5-6 = 5uH  $\pm$  10%
- TURN RATIO (@3MHZ, 0.1Vrms 4-5,6-7 SHORT) : PIN 1-10 : 5-6 = 4  $\pm$  2%
- HI-POT (@625VAC, 1mA, 1SEC 4-5,6-7 SHORT) : PRI-SEC
- RoHS COMPLIANCE

|           |             |               |      |         |         |                                   |        |              |
|-----------|-------------|---------------|------|---------|---------|-----------------------------------|--------|--------------|
|           |             |               |      |         |         | <b>Atech®</b>                     |        | TITLE        |
|           |             |               |      |         |         | Atech Technology Co., Ltd.        |        | TRANSFORMER  |
|           |             |               |      |         |         | TEL:02)2794-6667 FAX:02)2794-8004 |        | DWG. NO.     |
|           |             |               |      |         |         |                                   |        | ATS-861R     |
| RELEASE   |             | 07/27<br>2007 | PAIR | VINCENT | TEUGENE | UNITS:                            | SAFETY | SHEET 1 OF 1 |
| M/M       |             |               |      |         |         |                                   |        |              |
| NO.       | DESCRIPTION | DATE          | BY   | CHK     | APPD    | DATE                              | P/N:   | DRAW         |
| REVISIONS |             |               |      |         |         | 07/27/07                          |        | Pair         |