
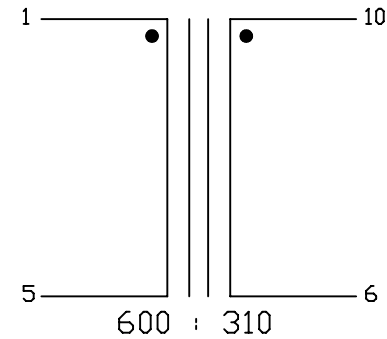
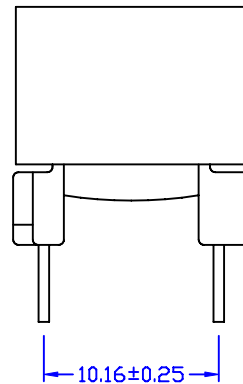
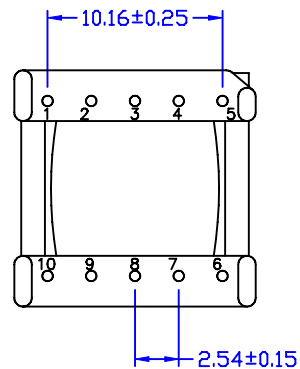
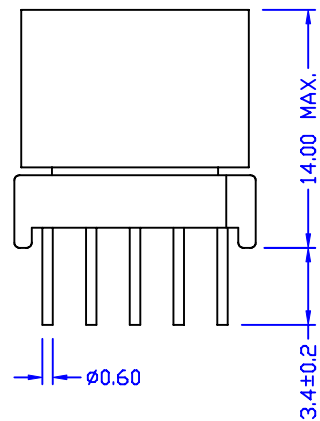


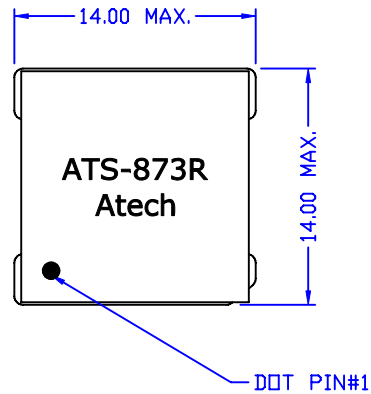

ELECTRICAL CHARACTERISTICS : <50819R COMPATIBLE>

- DCR : PIN 1-5 = 130 Ω HM $\pm$ 15%
PIN 10-6 = 160 Ω HM $\pm$ 15%
- INDUCTANCE (@300HZ, 1Vrms) : PIN 1-5 = 7.3H TYP.
- Z (@1KHZ, 1Vrms) : PIN 1-5 <10-6 W/H, 310 Ω HM) = 600 $\pm$ 10%
- RETURN LOSS (@300HZ, 1Vrms) : PIN1-5 <10-6 W/H, 310 Ω HM) = 20dB MIN.
- THD (@600HZ, -10dBm) : PIN 1-5 <10-6 W/H, 310 Ω HM) = 82dB TYP.
- TURN RATIO (@1KHZ, 1Vrms) : PIN 1-5 : 10-6 = 1 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 3SEC) : PIN 1-10
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE 600 : 310 TRANSFORMER	
							DWG. NO. ATS-873R	
	RELEASE	10/12/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW <i>Pair</i>
REVISIONS						10/12/07		