
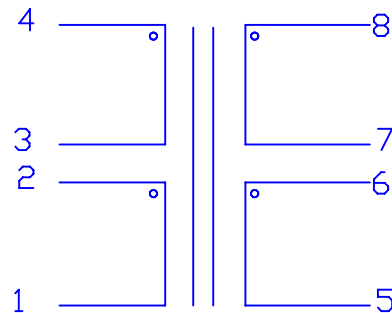
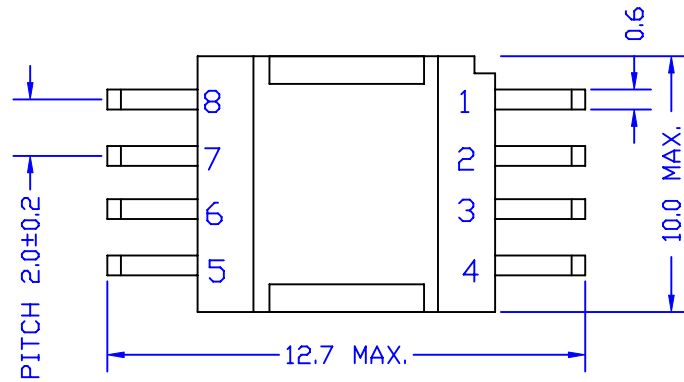


ATS-874R
• Atech

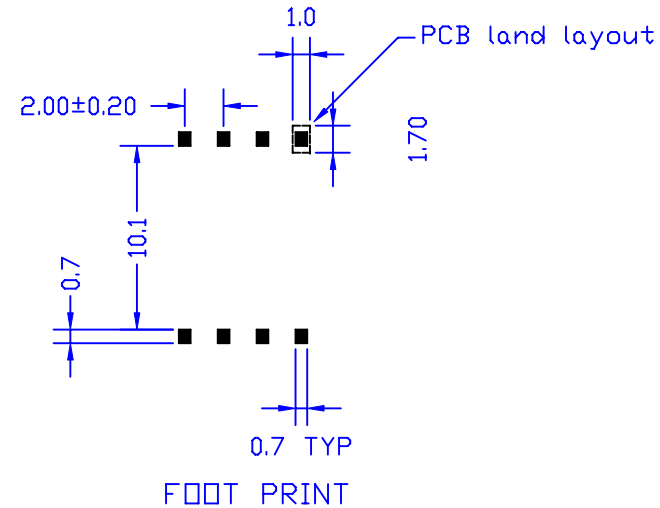

ELECTRICAL CHARACTERISTICS:

1. D.C.R.(@2-3,6-7 SHORT) : PIN 1-4= 130 mΩ MAX.
PIN 5-8 = 260 mΩ MAX.
2. INDUCTANCE (@500KHZ,0.5Vrms) : PIN 3-4 = 45.6uH MIN.
3. LEAKAGE INDUCTANCE(@500KHZ,0.5Vrms,1-2,5-6-7-8 SHORT)
PIN 3-4 = 1uH MAX.
4. TURNS RATIO (@20KHZ, 0.1Vrms,2-3,6-7 SHORT)
PIN 8-5 : 4-1 = 1.5+/-1%
5. HI-POT (@500VAC, 1mA, 2SEC,2-3,6-7 SHORT) PRI-SEC
6. RoHS COMPLIANT

						Atech [®]		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02)2794-6667 FAX: (02)2794-8004		DWG. NO.
								ATS-874R
RELEASE		12/20/2007	PAIR		SUEDY	UNITS:	SAFETY	
						M/M		
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	12/20/07	
REVISIONS								
							SHEET 1 OF 1	
							DRAW	
							Pair	