

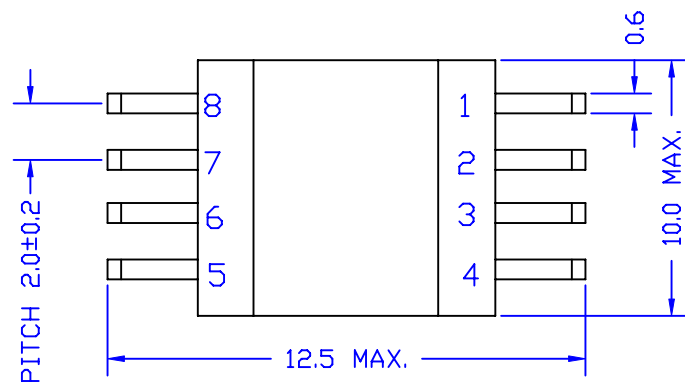
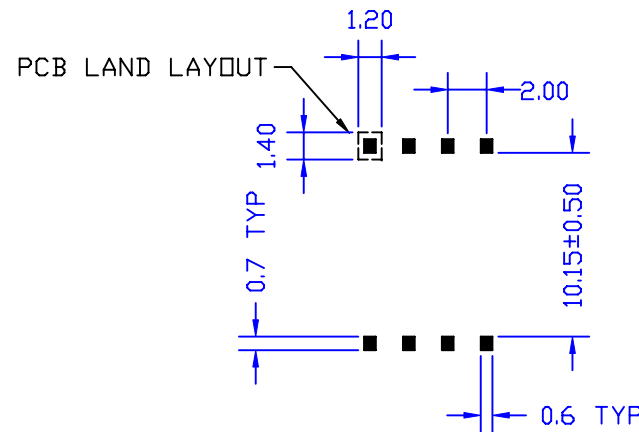


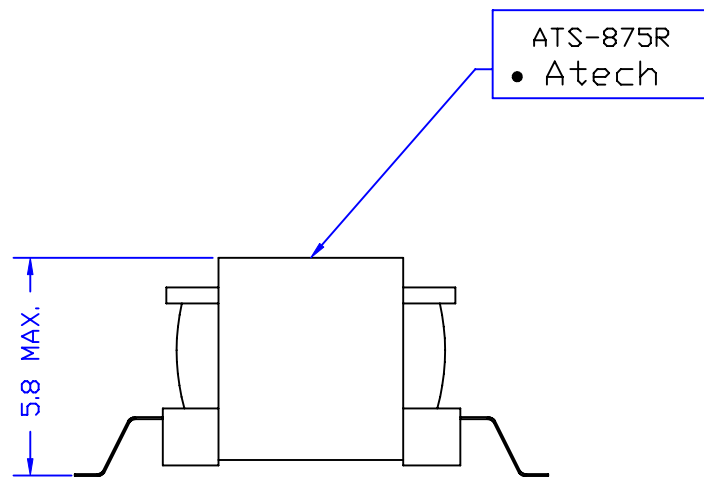

ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-4 = 5.5 Ω HM MAX.
PIN 5-8 = 1.7 Ω HM MAX.
- 2 INDUCTANCE (@ 1 KHZ, 0.1 Vrms) :
PIN 1-4 = 61 mH MIN.
- 3 IMPEDANCE (@ 1KHZ, 0.1Vrms, PIN 1-4 W/H 150 Ω HM LOAD) :
PIN 5-8 = 8 Ω HM +/- 17%
- 4 RETURN LOSS (PIN 1-4 W/H 150 Ω HM LOAD)
@ 300 HZ = 10dB MIN. @ 1KHZ = 15dB MIN. @ 3400 HZ = 18dB MIN.
- 5 HI-POT (@ 1500 VAC, 1mA, 1 MINUTE) PIN 1-5
- 6 RoHS COMPLIANT



						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 150 : 8 TRANSFORMER	
							DWG. NO. ATS-875R	
	RELEASE	11/27/2007	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						11/27/07		