
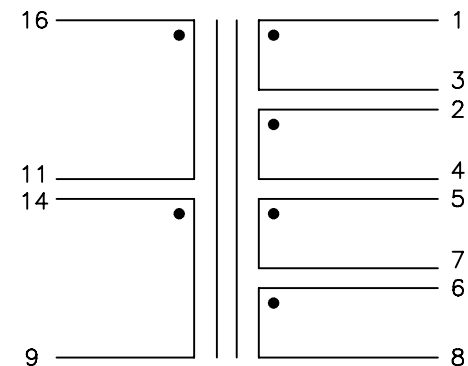
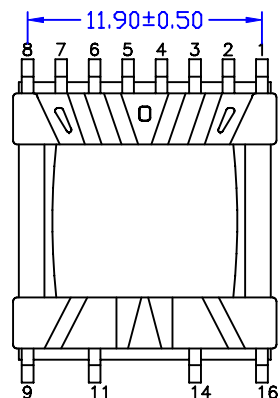
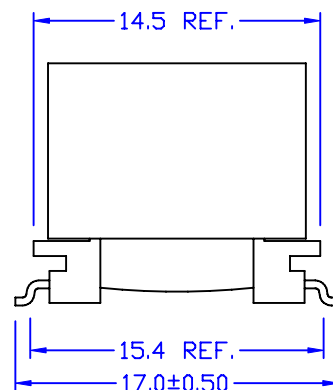



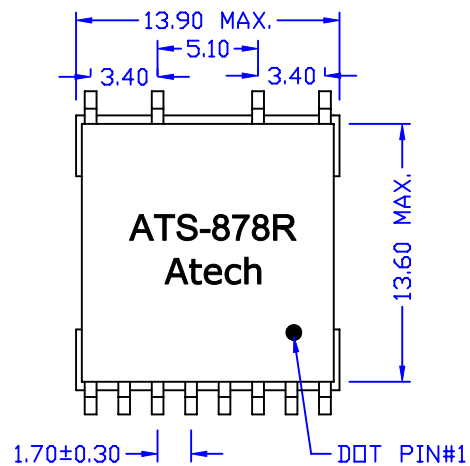

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4<PIN 2-3 SHORT> = 0.84 OHM MAX.
PIN 5-8<PIN 6-7 SHORT> = 0.25 OHM MAX.
PIN 16-9<PIN 11-14 SHORT> = 0.42 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 16-9 <11-14 SHORT> : = 100uH ±5%.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 16-9 <1-2-3-4-5-6-7-8,11-14 SHORT> = 3.5uH MAX.
- INTERWINDING CAP. (@100KHZ,0.1Vrms) :
PIN 16-1<1-2-3-4-5-6-7-8,11-14 SHORT> = 50pF MAX.
- T.H.D. (@100KHZ, 4Vrms) :
PIN 16-9 TO 1-4<11-14,2-3,SHORT,> = -85dB MAX.
PIN 16-9 TO 5-8<11-14,6-7,SHORT>= -85dB MAX.
- TURN RATIO(@250KHZ,0.1Vrms) :
PIN 16-9<11-14 SHORT> : 1-4<2-3 SHORT> = 1 ±2%
PIN 16-9<11-14 SHORT> : 5-8<6-7 SHORT> = 4.25±2%.
- HI-POT : (@1875VAC, 1mA, 2S) PRI-SEC
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE		TRANSFORMER	
								DWG. NO.		ATS-878R	
	RELEASE	12/27/2007	PAIR	VINCENT	EUGENE	UNITS: M/M		SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:		DRAW <i>Pair</i>	
REVISIONS						12/27/07					