
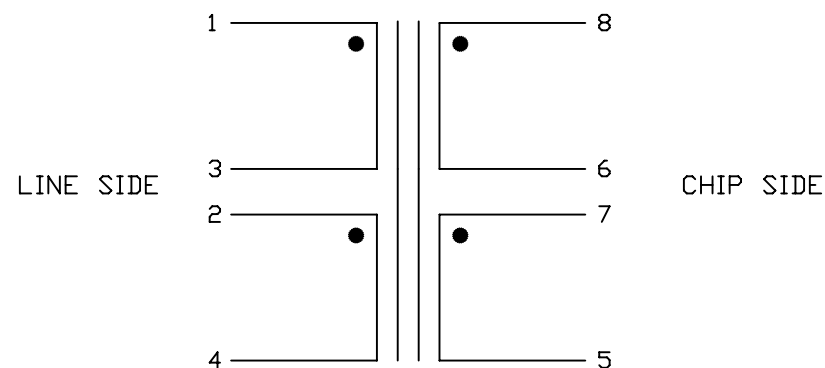
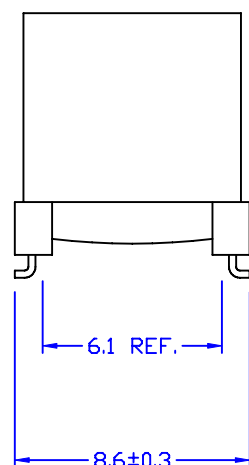
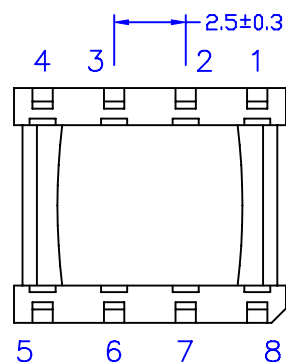
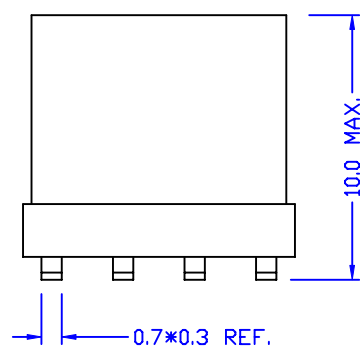


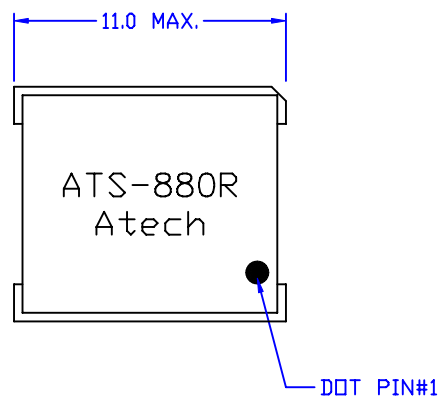

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 1.45 OHM±20%
PIN 8-5 (6-7 SHORT) = 1.10 OHM±20%
- INDUCTANCE (@0.1Vrms, 10KHz) :
PIN 1-4 (2-3 SHORT) = 470 uH ±10%.
- LEAKAGE INDUCTANCE (@0.1Vrms, 200KHz) :
PIN 1-4 (2-3, 5-6-7-8 SHORT) = 1 uH MAX.
- TURN RATIO (@1Vrms, 20KHz) :
PIN 1-4:8-5 (2-3,6-7 SHORT) = 1.333 ±3%.
- HI-POT (@1800VAC, 2mA, 1SEC) :
PRI-SEC
- RoHS COMPLIANT.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE VDSL TRANSFORMER	
							DWG. NO. ATS-880R	
	RELEASE	12/25/2007	Pair	MICHAEL	Eugene	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						12/25/07	DRAW <i>Pair</i>	