
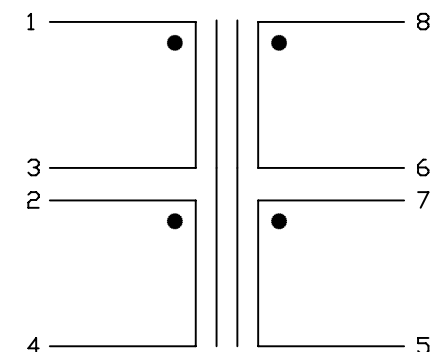
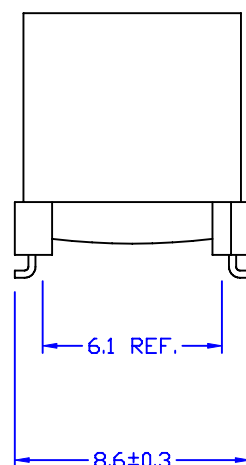
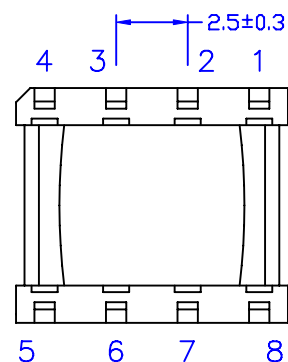
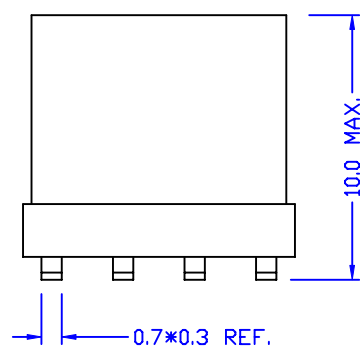


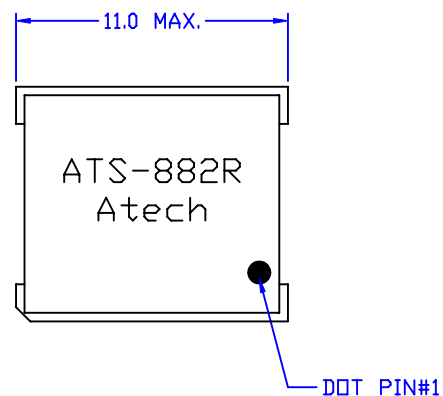

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 3 OHM MAX.
PIN 8-5 (6-7 SHORT) = 2 OHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 800 uH ±10%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3, 5-6-7-8 SHORT) = 2 uH MAX.
- INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-8 (1-2-3-4, 5-6-7-8 SHORT) = 50 pF MAX.
- TURN RATIO (@10KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) : 8-5 (6-7 SHORT) = 2 ±2%
- HI-POT (@1875VAC, 0.5mA, 1S) :
PIN 1-8 (2-3, 6-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE VDSL TRANSFORMER	
							DWG. NO. ATS-882R	
	RELEASE	01/11/2008	Pair	Vincent	Eugene		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						01/11/08	DRAW <i>Pair</i>	