
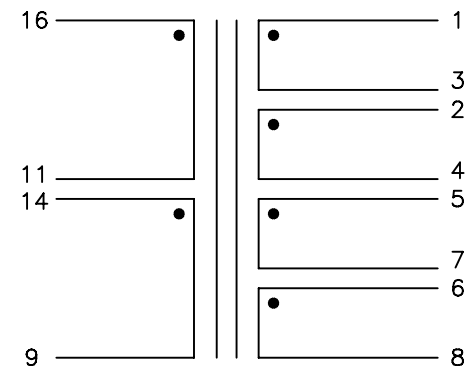
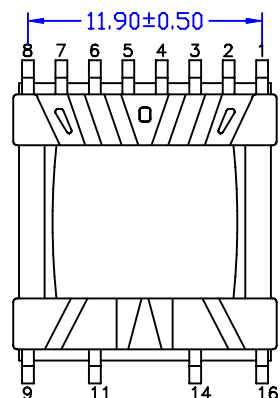
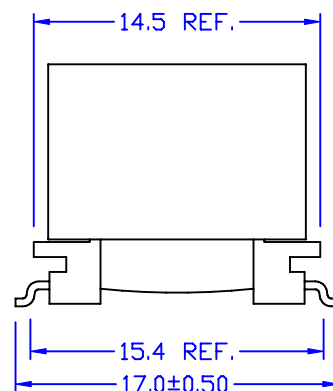



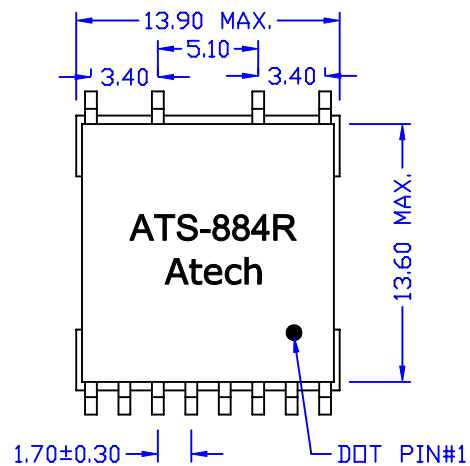

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (PIN 2-3 SHORT) = 1.95 OHM MAX.
PIN 5-8 (PIN 6-7 SHORT) = 555m OHM MAX.
PIN 16-9 (PIN 11-14 SHORT) = 2.1 OHM ±15%
- INDUCTANCE (@10KHZ, 50mVrms) :
PIN 16-9 (11-14 SHORT) : = 400uH ±10%.
- LEAKAGE INDUCTANCE (@100KHZ, 50mVrms) :
PIN 16-9 (11-14, 1-2-3-4-5-6-7-8, SHORT) = 20uH MAX.
- INTERWINDING CAP. (@1KHZ, 50mVrms) :
PIN 16-1 (11-14, 2-3 SHORT) = 20pF MAX.
- T.H.D. (@30KHZ, 3Vrms) :
PIN 16-9 (11-14, 2-3, 6-7, SHORT,
1-4 W/H 100 OHM, 5-8 W/H 5.6 OHM) = -90dB MAX.
- TURN RATIO (@600KHZ, 0.1Vrms) :
PIN 16-9 (11-14 SHORT) : 1-4 (2-3 SHORT) = 1 ±2%
PIN 16-9 (11-14 SHORT) : 5-8 (6-7 SHORT) = 4.25 ±2%
- HI-POT : (@1875VAC, 1mA, 2S) PRI-SEC
- RoHS COMPLIANCE.

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL: 02-2794-6667 FAX: 02-2794-8004		DWG. NO.
								ATS-884R
RELEASE		03/06	PAIR	VINCENT	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO		DATE	BY	CHK	APPD	M/M	P/N:	DRAW
REVISIONS						03/06		Pair