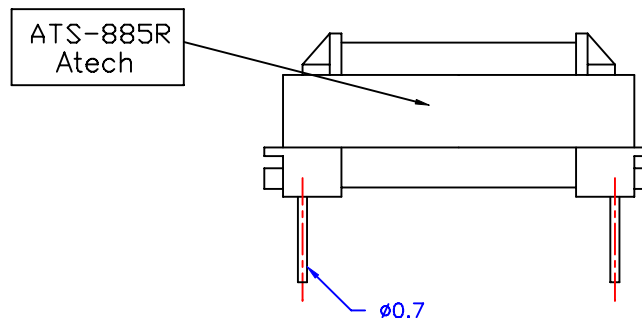
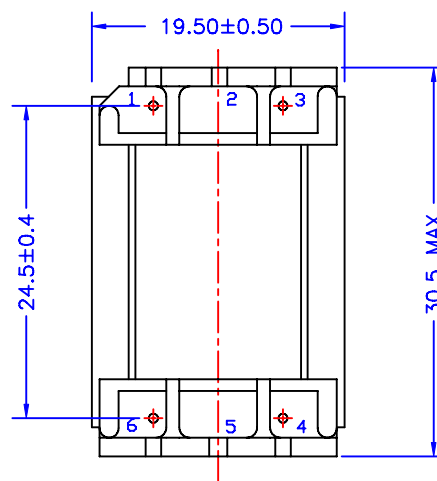
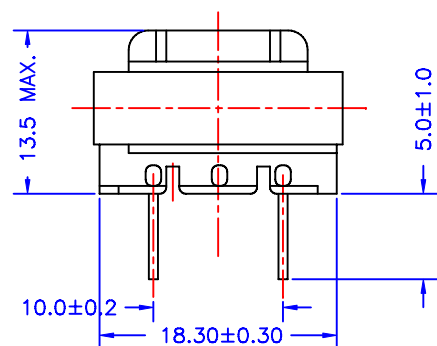


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-3 = 76 OHM $\pm$ 15%
PIN 4-6 = 98 OHM $\pm$ 15%
- 2 INDUCTANCE : (AT 300HZ, 1Vrms) PIN 1-3 = 250mH MIN.(W/H 80mADC)
- 3 INSERTION LOSS = 2.0dB MAX.(AT 1KHZ, 1Vrms)
- 4 FREQ. RESP. (REF. TO 1KHZ)@300HZ= $\pm$ 1.7dB,@4KHZ= $\pm$ 1.7dB
- 5 HI-POT = 500VAC, 1mA, 60SEC (PRI-SEC)
- 6 RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 600 TRANSFORMER	
								DWG. NO. ATS-885R	
	RELEASE	02/27/2008	PAIR	Willie	SUEDY	UNITS: M/M		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/27/08		P/N: CTP019003A	
REVISIONS								DRAW <i>Pair</i>	
								SHEET 1 OF 1	