

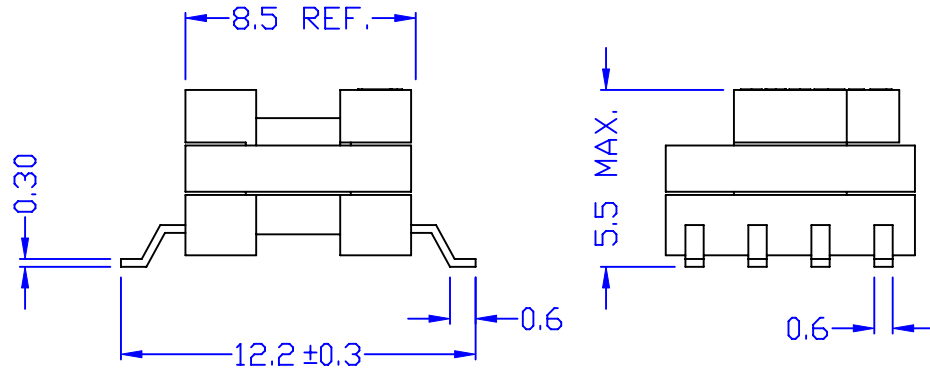
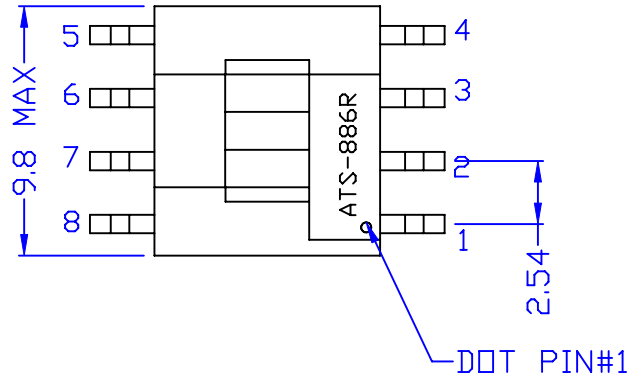


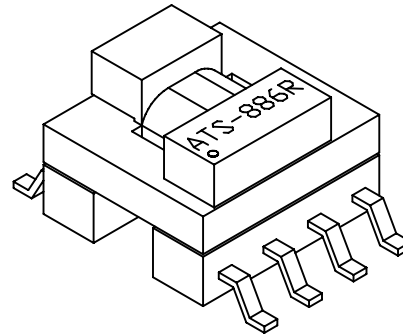

ELECTRICAL SPECIFICATION :

1. D.C.R : 1-8 = 440 mΩ MAX, 8-2 = 480 mΩ MAX.
2-7 = 520 mΩ MAX, 3-6 = 60 mΩ MAX.
4-5 = 70 mΩ MAX.
2. INDUCTANCE(@100KHZ, 0.1Vrms) :
3-6 = 0.77uH±10% 4-5 = 0.77uH±10%
(@100KHZ, 0.1Vrms, W/H 1ADC)
3-6 = 0.65uH MIN. 4-5 = 0.65uH MIN.
3. LEAKAGE INDUCTANCE(@100KHZ, 0.1Vrms) :
3-6(1-2-7-8, SHORT) = 0.16uH MAX.
4-5(1-2-7-8, SHORT) = 0.16uH MAX.
4. TURN RATIO : (@800KHZ, 0.1Vrms) :
1-8 : 2-7 = 1±7% 1-8 : 8-2 = 1±7%
1-8 : 3-6 = 2.67±7% 1-8 : 4-5 = 2.67±7%
5. HI-POT(@500VAC, 1mA, 1S) : 3-1(4-6, SHORT)
6. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-886R	
	RELEASE	03/28/2008	Pair	Vincent	Eugene	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW <i>Pair</i>
REVISIONS						03/28/08			