
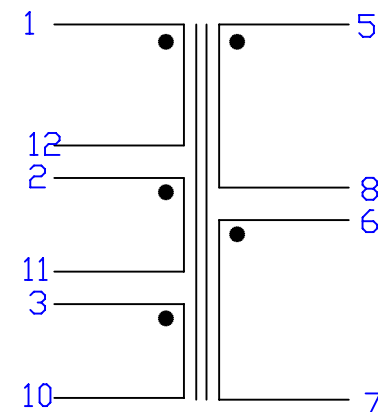
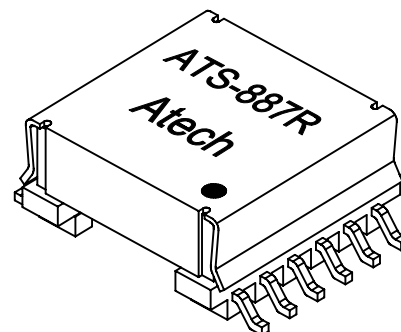
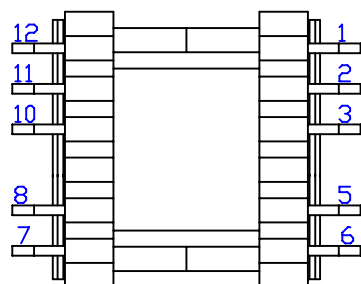
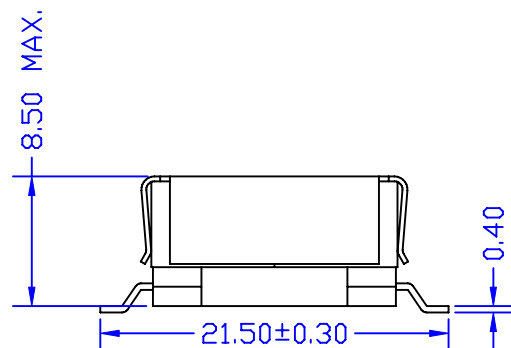


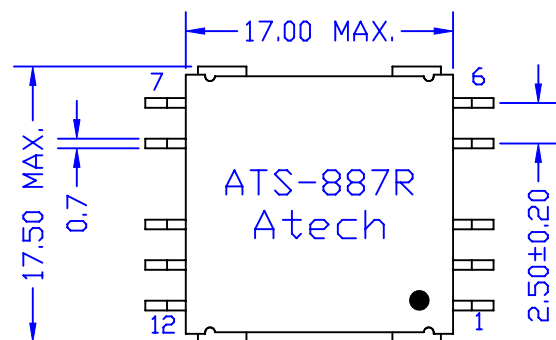

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-12 = 2-11 = 47.5m OHM AX. PIN 3-10 = 150m OHM MAX.
PIN 5-8 = 6-7 = 10.5m OHM MAX.
- INDUCTANCE (@250KHz, 0.3Vrms) :
PIN 1-11 (2-12 SHORT) = 35uH±10%
(1ADC) : PIN 1-11 (2-12 SHORT) = 31.5uH MIN.
- TURN RATIO (@1.5MHz, 0.1Vrms) :
PIN 1-11 (2-12 SHORT) : 5-7 (6-8 SHORT) = 2.75±2%
PIN 1-11 (2-12 SHORT) : 3-10 = 2.75±2%
- HI-POT (@500VAC, 1mA, 1SEC) :
PIN 1-5 (11-12, 7-8 SHORT)
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02(2)794-6667 FAX:02(2)794-8004	TITLE DC/DC TRANSFORMER	
							DWG. NO. ATS-887R	
	RELEASE	3/14/2008	Pair	Vincent	Eugene	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						03/15/08	DRAW <i>Pair</i>	