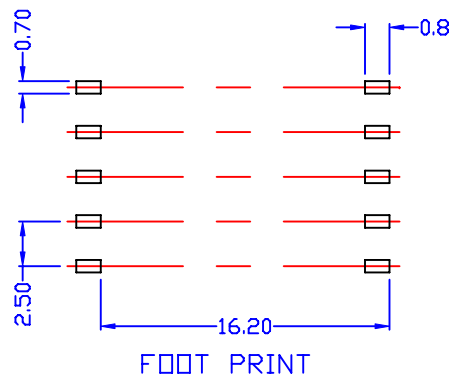
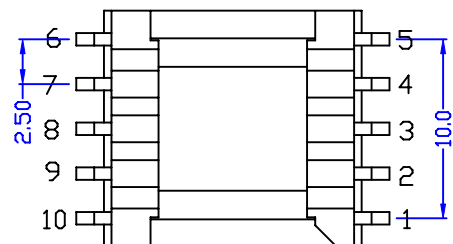
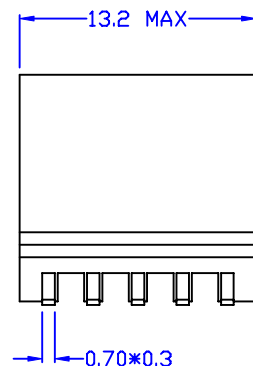
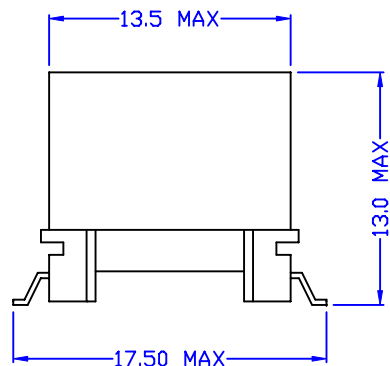
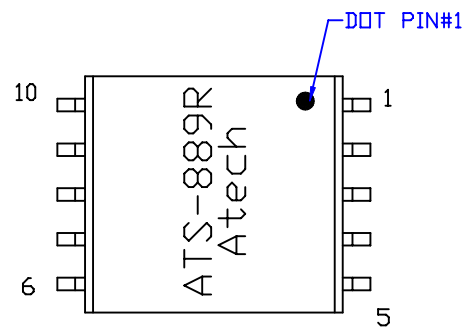


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-4 = 2.5 OHM MAX.
PIN 2-5 = 2.5 OHM MAX.
PIN 7-9 = 0.7 OHM MAX.
2. INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 3.019 mH±6%
3. LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-5 (2-4,7-9 SHORT) = 35uH MAX.
4. T.H.D (@5KHz, 1Vrms) :
PIN 1-5(2-4 SHORT, 7-9 W/H,6.8 OHM, INPUT 135 OHM) = -90 dB MAX.
5. TURN RATIO (@5KHz, 0.1Vrms) :
PIN 1-4 : PIN 2-5 = 1 ±1% PIN 1-4 : PIN 9-7 = 2.25±1%
6. HI-POT (@2KVAC, 1mA, 1SEC) : PIN 1-7 (2-4 SHORT)
@500VAC, 1mA, 1SEC) : PIN 1-5
7. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE XDSL TRANSFORMER	
							DWG. NO. ATS-889R	
	RELEASE	05/07/2008	PAIR	Vincent	Eugene	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW <i>Pair</i>
REVISIONS						05/07/08		