
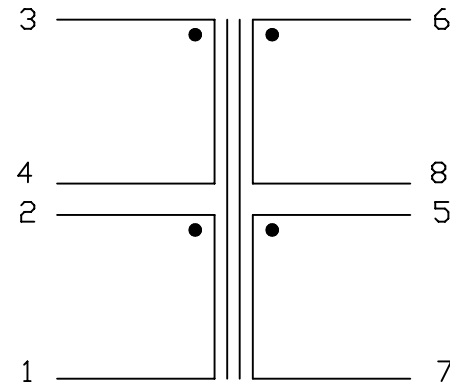


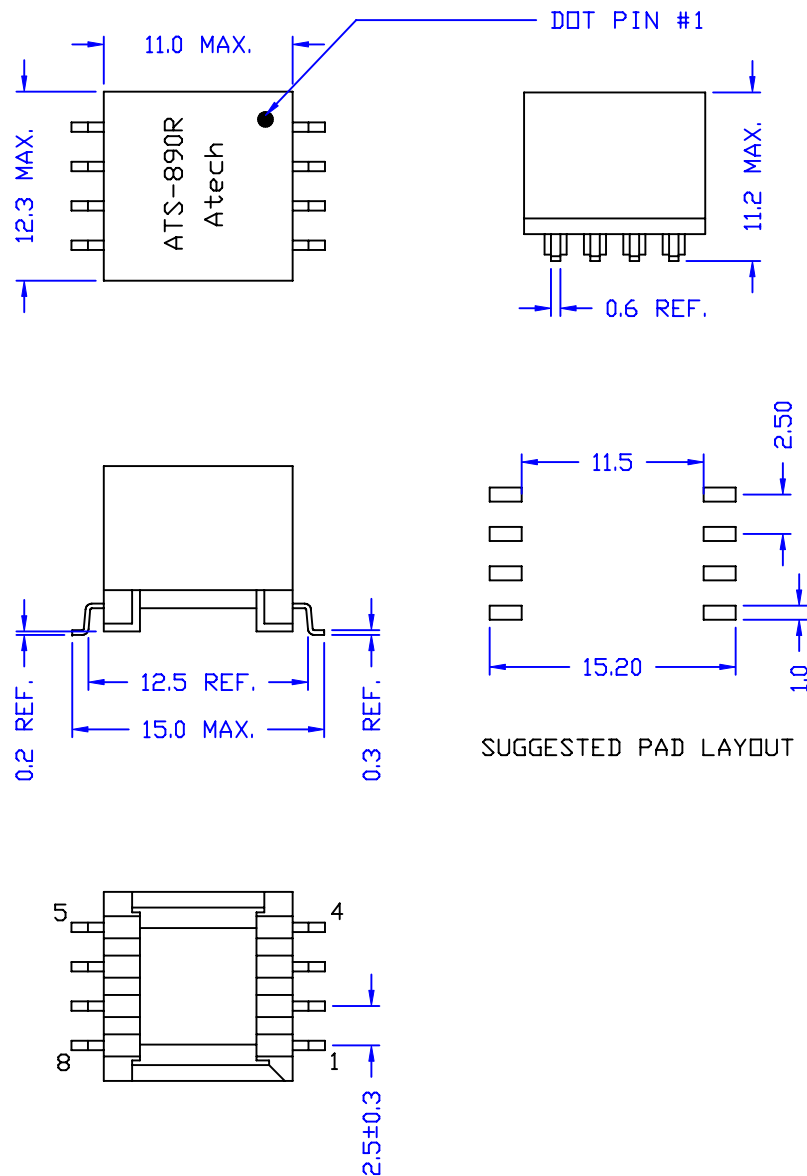

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 822m Ω M MAX.
PIN 3-4 = 414m Ω M MAX.
PIN 5-6 = 60m Ω M MAX.
PIN 7-8 = 60m Ω M MAX.
- INDUCTANCE (@250KHZ, 0.1Vrms) :
PIN3-4 = 155 μ H $\pm$ 10%
- LEAKAGE INDUCTANCE(@250KHZ,0.1Vrms 1-2-5-6-7-8 SHORT)
PIN 3-4 = 3.6 μ H MAX.
- TURN RATIO(@250KHZ, 0.1Vrms)
PIN 3-4 : 2-1 = 1.47 $\pm$ 2%
PIN 3-4 : 5-7 = 3.84 $\pm$ 2%
PIN 3-4 : 6-8 = 3.85 $\pm$ 2%
- HI-POT (@1500VDC, 1mA, 1SEC) : PIN 3-5 , 3-6
(@500VAC, 1mA, 2SEC) : PIN 1-3
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-890R	
	RELEASE	04/15/2008	Pair	Willie	Eugene	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 04/15/08			DRAW <i>Pair</i>
REVISIONS									